

# Series MD filters

New

Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with Ø 6, 8 and 10 mm.

Modular assembly

Bowl with technopolymer cover and bayonet-type mounting



- » Removal of impurities and condensate
- » Clogging visual indicator
- » Semi-automatic manual or depressuring condensate drain
- » Version without drain with 1/8 port
- » Bowl locking system reducing the risk of accidents
- » Additional air intakes with the same characteristics of the outlet air (line)

The Series MD air treatment product line is characterized by a modern and linear design as well as high performance. The technopolymer structure has allowed to create a simplified, product, lightweight and robust at the same time.

Thanks to the solution adopted for the pneumatic connection, it is possible to equip the same element with interchangeable cartridges which can be threaded or with an integrated super-rapid fitting, both in different sizes. Intermediate cartridges can be also integrated to join multiple functions or with derivation to draw air. An additional air intake, with the same characteristic of the outlet air, is available on the front side and on the rear one. This intake can be used by utilities with limited consumption.

## GENERAL DATA

Construction	modular, compact with filtering element in HDPE
Materials	see TABLE OF MATERIALS (pag. 3/0.05.02)
Ports	with interchangeable cartridges: 1/8, 1/4 and 3/8 threaded or integrated with super-rapid fitting for tube with Ø 6, 8 and 10 mm
Condensate capacity	24 cc
Fixing	vertical in-line; wall-mounting by means of through holes in the body or with a support bracket
Operating temperature	-5°C ÷ 50°C up to 16 bar
Condensate drain	semi-automatic manual (standard); depressurization, protected; without drain with G1/8 port
Quality of delivered air according to ISO 8573-1 2010 standard	Class 6.8.4 with 5 µm filtering element Class 7.8.4 with 25 µm filtering element
Operating pressure	0.3 ÷ 16 bar
Nominal flow	see FLOW DIAGRAMS (pag. 3/0.05.03 and 3/0.05.04)
Fluid	compressed air

## CODING EXAMPLE

MD	1	-	F	0	0	0	-	1/8
----	---	---	---	---	---	---	---	-----

<b>MD</b>	SERIES
<b>1</b>	DIMENSION: 1 = 42 mm
<b>F</b>	FILTER
<b>0</b>	FILTERING ELEMENT: 0 = 25 µm 1 = 5 µm
<b>0</b>	CONDENSATE DRAIN: 0 = semiautomatic-manual 5 = depressurization, protected 8 = without drain, with G1/8 port
<b>0</b>	CLOGGING VISUAL INDICATOR: 0 = not present 1 = present
<b>1/8</b>	PORTS (IN - OUT)*: = without ports 1/8 = G1/8 1/4 = G1/4 3/8 = G3/8 6 = tube Ø6 8 = tube Ø8 10 = tube Ø10  * NOTE: if the inlet port is different from the outlet port, both values shall be indicated. Example: MD1-F000-1/8-1/4


3

TREATMENT

## Filters Series MD - materials



A = filter

B = filter with clogging visual indicator

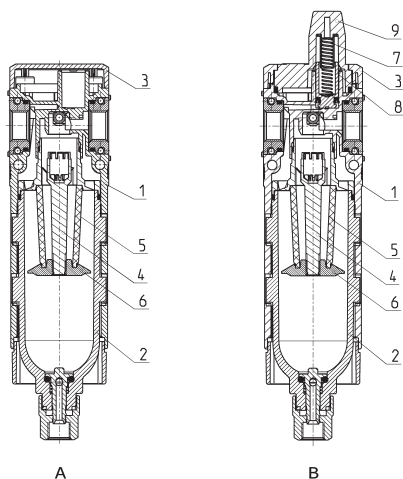

PARTS	MATERIALS
<b>1 = Body</b>	Polyamide
<b>2 = Tank</b>	Polycarbonate
<b>3 = Covering</b>	Polyamide
<b>4 = Valve-guide</b>	Polyacetal
<b>5 = Filtering element</b>	Polyethylene
<b>6 = Separation deflector</b>	Polyacetal
<b>7 = Upper spring</b>	Stainless steel
<b>8 = Piston</b>	Anodized aluminium
<b>9 = Clogging visual indicator</b>	Polycarbonate
<b>Seals</b>	NBR

# FLOW DIAGRAMS for models with 25 $\mu$ m filtering element

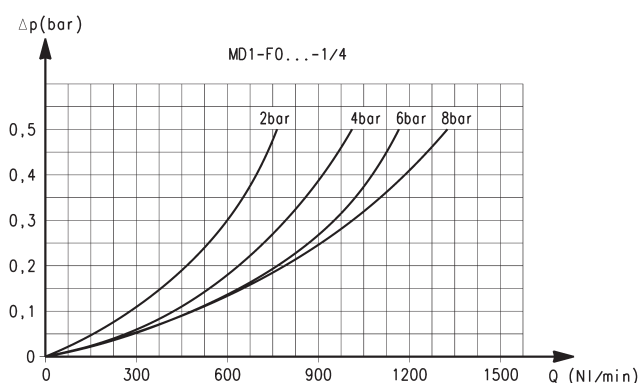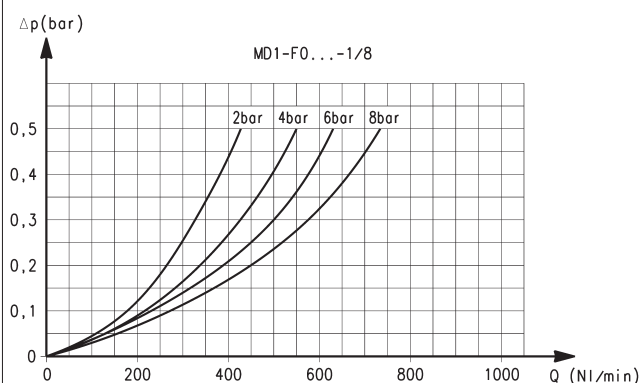


Ports with interchangeable 1/8 threaded cartridges

$\Delta p$  = Pressure drop  
 $Q$  = Flow

Ports with interchangeable 1/4 threaded cartridges

$\Delta p$  = Pressure drop  
 $Q$  = Flow


# FLOW DIAGRAMS for models with 25 $\mu$ m filtering element

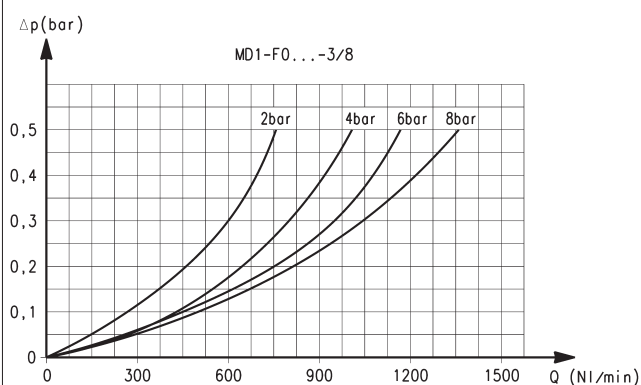

Ports with interchangeable 3/8 threaded cartridges


$\Delta p$  = Pressure drop  
 $Q$  = Flow

# FLOW DIAGRAMS for models with 5 $\mu$ m filtering element

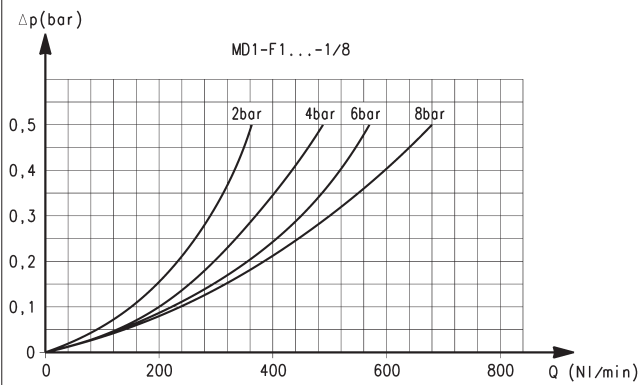

Ports with interchangeable 1/8 threaded cartridges

$\Delta p$  = Pressure drop  
Q = Flow

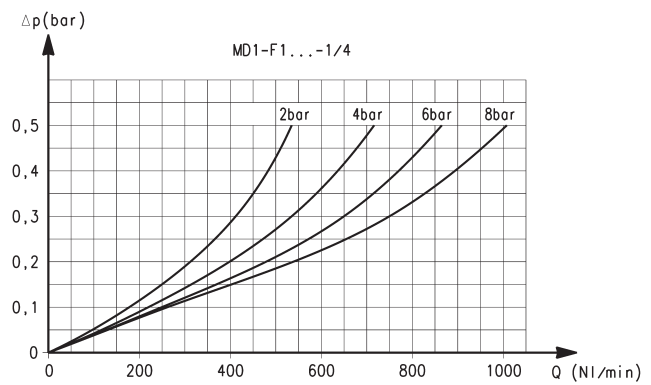


Ports with interchangeable 1/4 threaded cartridges

$\Delta p$  = Pressure drop  
Q = Flow

3

TREATMENT

# FLOW DIAGRAMS for models with 5 $\mu$ m filtering element

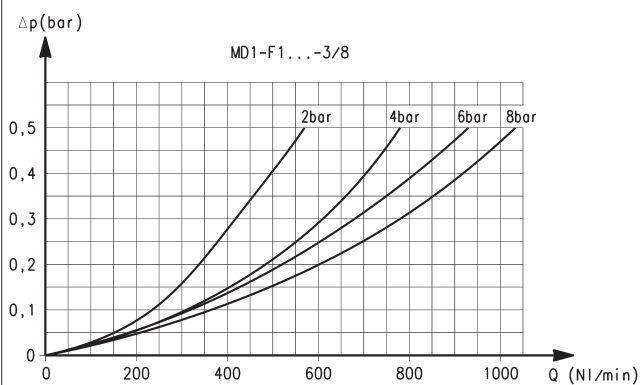

Ports with interchangeable 3/8 threaded cartridges





$\Delta p$  = Pressure drop  
Q = Flow



## Series MD filters - dimensions



FT01 = filter without drain  
with threaded port  
FT02 = filter with  
semiautomatic manual  
drain  
FT03 = filter with automatic  
or depressuring drain

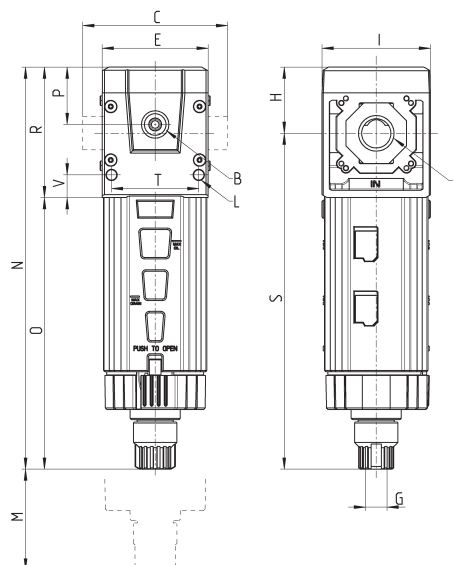





## DIMENSIONS

Mod.	A	B	C	E	G	H	I	L	M	N	O	P	R	S	T	V	Weight (Kg)
<b>MD1-F000</b>	-	G1/8	42	42	G1/8	26.2	43	Ø4	90	159.4	107.7	22.7	51.7	133.2	34.6	9	0.2
<b>MD1-F000-1/8</b>	G1/8	G1/8	42	42	G1/8	26.2	43	Ø4	90	159.4	107.7	22.7	51.7	133.2	34.6	9	0.2
<b>MD1-F000-1/4</b>	G1/4	G1/8	42	42	G1/8	26.2	43	Ø4	90	159.4	107.7	22.7	51.7	133.2	34.6	9	0.2
<b>MD1-F000-3/8</b>	G3/8	G1/8	42	42	G1/8	26.2	43	Ø4	90	159.4	107.7	22.7	51.7	133.2	34.6	9	0.2
<b>MD1-F000-6</b>	Ø6	G1/8	47	42	G1/8	26.2	43	Ø4	90	159.4	107.7	22.7	51.7	133.2	34.6	9	0.2
<b>MD1-F000-8</b>	Ø8	G1/8	62	42	G1/8	26.2	43	Ø4	90	159.4	107.7	22.7	51.7	133.2	34.6	9	0.2
<b>MD1-F000-10</b>	Ø10	G1/8	67	42	G1/8	26.2	43	Ø4	90	159.4	107.7	22.7	51.7	133.2	34.6	9	0.2

## Series MD filters with clogging visual indicator - dimensions



FT01 = filter without drain  
with threaded port  
FT02 = filter with  
semiautomatic manual  
drain  
FT03 = filter with automatic  
or depressuring drain

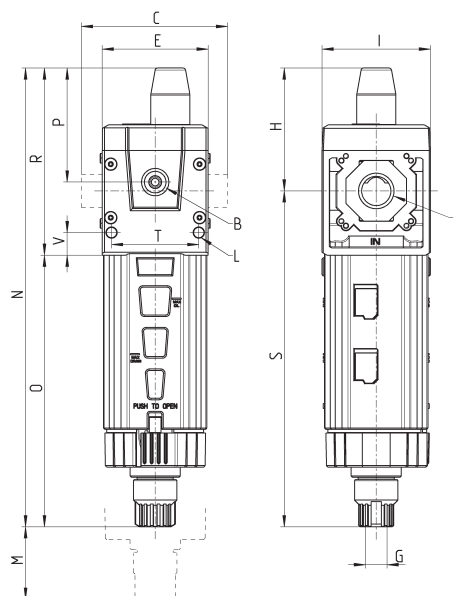

## DIMENSIONS

Mod.	A	B	C	E	G	H	I	L	M	N	O	P	R	S	T	V	Weight (Kg)
<b>MD1-F001</b>	-	G1/8	42	42	G1/8	48.7	43	Ø4	90	181.9	107.7	45.2	74.2	133.2	34.6	9	0.2
<b>MD1-F001-1/8</b>	G1/8	G1/8	42	42	G1/8	48.7	43	Ø4	90	181.9	107.7	45.2	74.2	133.2	34.6	9	0.2
<b>MD1-F001-1/4</b>	G1/4	G1/8	42	42	G1/8	48.7	43	Ø4	90	181.9	107.7	45.2	74.2	133.2	34.6	9	0.2
<b>MD1-F001-3/8</b>	G3/8	G1/8	42	42	G1/8	48.7	43	Ø4	90	181.9	107.7	45.2	74.2	133.2	34.6	9	0.2
<b>MD1-F001-6</b>	Ø6	G1/8	47	42	G1/8	48.7	43	Ø4	90	181.9	107.7	45.2	74.2	133.2	34.6	9	0.2
<b>MD1-F001-8</b>	Ø8	G1/8	62	42	G1/8	48.7	43	Ø4	90	181.9	107.7	45.2	74.2	133.2	34.6	9	0.2
<b>MD1-F001-10</b>	Ø10	G1/8	67	42	G1/8	48.7	43	Ø4	90	181.9	107.7	45.2	74.2	133.2	34.6	9	0.2

# Series MD coalescing filters

New

Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with Ø 6, 8 and 10 mm.

Modular assembly

Bowl with technopolymer cover and bayonet-type mounting



The coalescing filter is a fine oil separator filter that removes the solids with dimensions from 0.1 to 5 µm and oil vapours with a concentration from 0.01 to 0.1 mg/m³. For a correct functioning they require a pre-filtering. Given the characteristic of this filter, it is recommended to replace the filter element at least every 12 months or 8000 working hours.

Thanks to the solution adopted for the pneumatic connection, it is possible to equip the same element with interchangeable cartridges which can be threaded or with an integrated super-rapid fitting, both in different sizes. Intermediate cartridges can be also integrated to join multiple functions or with derivation to draw air. An additional air intake, with the same characteristic of the outlet air, is available on the front side and on the rear one. This intake can be used by utilities with limited consumption.

- » High performance and high purity compressed air
- » Air quality according to ISO 8573-1:2010 standard, Class 1.8.1 and Class 2.8.2
- » Clogging visual indicator
- » Semi-automatic manual or depressuring condensate drain
- » Version without drain with 1/8 port
- » Bowl locking system reducing the risk of accidents
- » Additional air intakes with the same characteristics of the inlet air (line)

3

TREATMENT

## GENERAL DATA

Construction	modular, compact with filtering element in BOROSILICATE	
Materials	see TABLE OF MATERIALS (pag. 3/0.10.02)	
Ports	with interchangeable cartridges: 1/8, 1/4 and 3/8 threaded or integrated with super-rapid fitting for tube with Ø 6, 8 and 10 mm	
Condensate capacity	24 cc	
Fixing	vertical in-line; wall-mounting by means of through holes in the body or with a support bracket	
Operating temperature	-5°C ÷ 50°C up to 16 bar	
Condensate drain	semi-automatic manual (standard); depressurization, protected; without drain with G1/8 port	
Quality of delivered air according to ISO 8573-1 2010 standard	Class 2.8.2 with 1 µm filtering element (pre-filtering with Class 6.8.4 is recommended) Classe 1.8.1 with 0.01 µm filtering element (pre-filtering with Classe 2.8.2 is recommended)	
Operating pressure	0.3 ÷ 16 bar	
Nominal flow	see FLOW DIAGRAMS (pag. 3/0.10.03 and 3/0.10.04)	
Oil retain efficiency	99,80%	97%
Particles retain efficiency	99,99999%	99,999%
Fluid	compressed air	

# CODING EXAMPLE

MD	1	-	FC	0	0	0	-	1/8
----	---	---	----	---	---	---	---	-----

<b>MD</b>	SERIES
<b>1</b>	DIMENSION: 1 = 42 mm
<b>FC</b>	COALESCING FILTER
<b>0</b>	FILTERING ELEMENT: 0 = 0,01 µm 1 = 1 µm
<b>0</b>	CONDENSATE DRAIN: 0 = semiautomatic-manual 5 = depressurization, protected 8 = without drain, with G1/8 port
<b>0</b>	CLOGGING VISUAL INDICATOR: 0 = not present 1 = present
<b>1/8</b>	PORTS (IN - OUT)*: = without ports 1/8 = G1/8 1/4 = G1/4 3/8 = G3/8 6 = tube Ø6 8 = tube Ø8 10 = tube Ø10  * NOTE: if the inlet port is different from the outlet port, both values shall be indicated. Example: MD1-FC000-1/8-1/4


3

TREATMENT

## Series MD coalescing filters - materials


A = filter

B = filter with clogging visual indicator

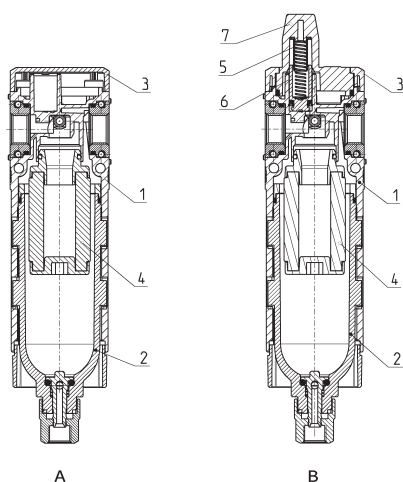


PARTS	MATERIALS
<b>1 = Body</b>	Polyamide
<b>2 = Tank</b>	Polycarbonate
<b>3 = Covering</b>	Polyamide
<b>4 = Filtering element</b>	Borosilicate
<b>5 = Upper spring</b>	Stainless steel
<b>6 = Piston</b>	Anodized aluminium
<b>7 = Clogging visual Indicator</b>	Polycarbonate
<b>Seals</b>	NBR

### FLOW DIAGRAMS for models with 1 $\mu$ m filtering element

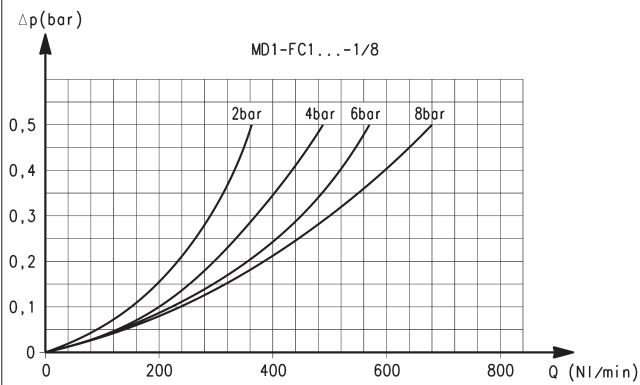

Ports with interchangeable 1/8 threaded cartridges

$\Delta p$  = Pressure drop  
 $Q$  = Flow

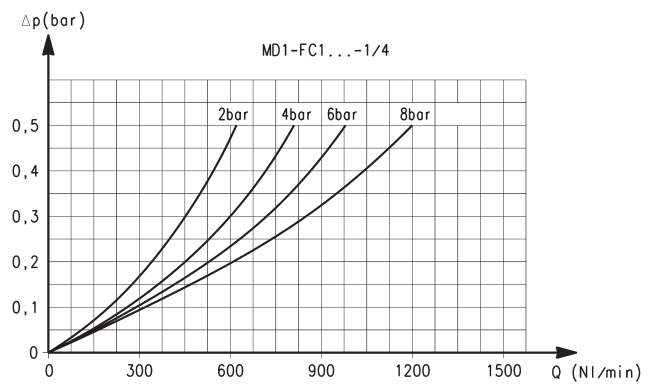


Ports with interchangeable 1/4 threaded cartridges

$\Delta p$  = Pressure drop  
 $Q$  = Flow

3

TREATMENT



### FLOW DIAGRAMS for models with 1 $\mu$ m filtering element

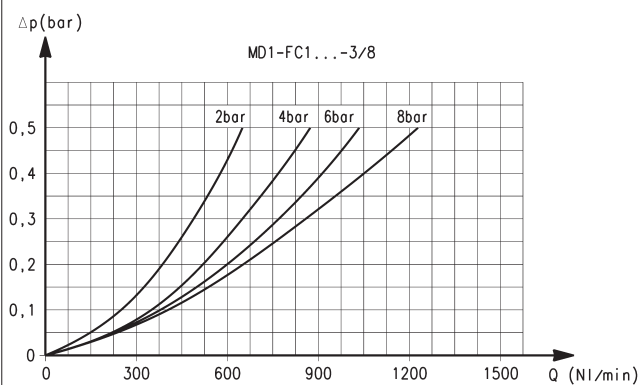

Ports with interchangeable 3/8 threaded cartridges

$\Delta p$  = Pressure drop  
 $Q$  = Flow

# FLOW DIAGRAMS for models with 0.01 µm filtering element

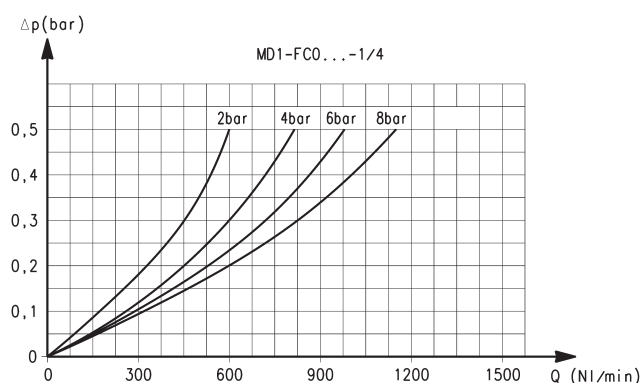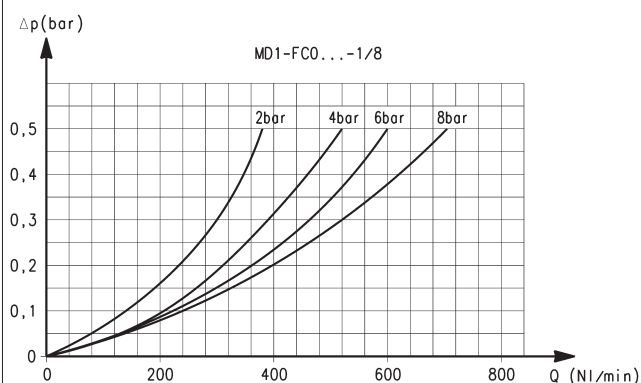


Ports with interchangeable 1/8 threaded cartridges

Δp = Pressure drop  
Q = Flow

Ports with interchangeable 1/4 threaded cartridges

Δp = Pressure drop  
Q = Flow

# FLOW DIAGRAMS for models with 0.01 µm filtering element

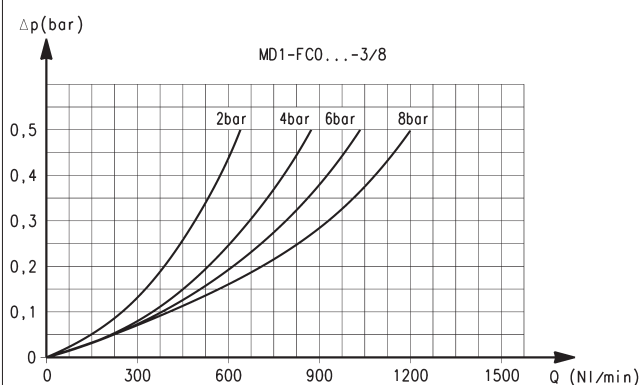

Ports with interchangeable 3/8 threaded cartridges

Δp = Pressure drop  
Q = Flow


## Series MD coalescing filters - dimensions



FA01 = coalescing filter  
without drain with threaded  
port  
FA02 = coalescing filter  
with semi-automatic  
manual drain  
FA03 = coalescing  
filter with automatic or  
depressuring drain




FA01



FA02



FA03

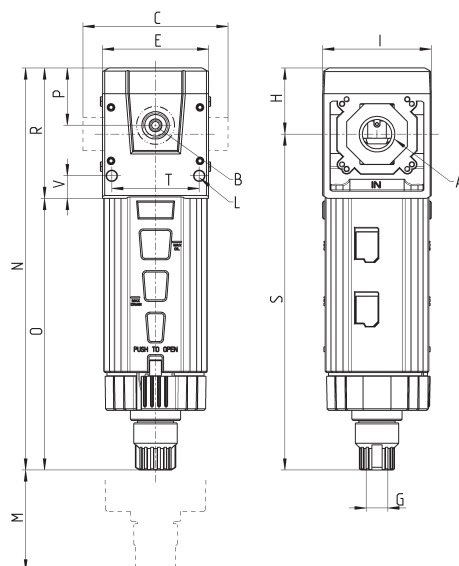

## DIMENSIONS

Mod.	A	B	C	E	G	H	I	L	M	N	O	P	R	S	T	V	Weight (Kg)
<b>MD1-FC000</b>	-	G1/8	42	42	G1/8	26.2	43	Ø4	90	159.4	107.7	22.7	51.7	133.2	34.6	9	0.2
<b>MD1-FC000-1/8</b>	G1/8	G1/8	42	42	G1/8	26.2	43	Ø4	90	159.4	107.7	22.7	51.7	133.2	34.6	9	0.2
<b>MD1-FC000-1/4</b>	G1/4	G1/8	42	42	G1/8	26.2	43	Ø4	90	159.4	107.7	22.7	51.7	133.2	34.6	9	0.2
<b>MD1-FC000-3/8</b>	G3/8	G1/8	42	42	G1/8	26.2	43	Ø4	90	159.4	107.7	22.7	51.7	133.2	34.6	9	0.2
<b>MD1-FC000-6</b>	Ø6	G1/8	47	42	G1/8	26.2	43	Ø4	90	159.4	107.7	22.7	51.7	133.2	34.6	9	0.2
<b>MD1-FC000-8</b>	Ø8	G1/8	62	42	G1/8	26.2	43	Ø4	90	159.4	107.7	22.7	51.7	133.2	34.6	9	0.2
<b>MD1-FC000-10</b>	Ø10	G1/8	67	42	G1/8	26.2	43	Ø4	90	159.4	107.7	22.7	51.7	133.2	34.6	9	0.2

## Series MD coalescing filters with clogging visual indicator - dimensions



FA01 = coalescing filter  
without drain with threaded  
port  
FA02 = coalescing filter  
with semi-automatic  
manual drain  
FA03 = coalescing  
filter with automatic or  
depressuring drain




FA01



FA02



FA03

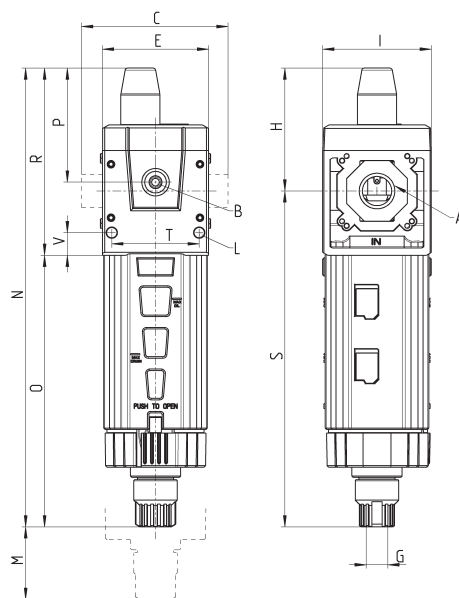

## DIMENSIONS

Mod.	A	B	C	E	G	H	I	L	M	N	O	P	R	S	T	V	Weight (Kg)
<b>MD1-FC001</b>	-	G1/8	42	42	G1/8	48.7	43	Ø4	90	181.9	107.7	45.2	74.2	133.2	34.6	9	0.2
<b>MD1-FC001-1/8</b>	G1/8	G1/8	42	42	G1/8	48.7	43	Ø4	90	181.9	107.7	45.2	74.2	133.2	34.6	9	0.2
<b>MD1-FC001-1/4</b>	G1/4	G1/8	42	42	G1/8	48.7	43	Ø4	90	181.9	107.7	45.2	74.2	133.2	34.6	9	0.2
<b>MD1-FC001-3/8</b>	G3/8	G1/8	42	42	G1/8	48.7	43	Ø4	90	181.9	107.7	45.2	74.2	133.2	34.6	9	0.2
<b>MD1-FC001-6</b>	Ø6	G1/8	47	42	G1/8	48.7	43	Ø4	90	181.9	107.7	45.2	74.2	133.2	34.6	9	0.2
<b>MD1-FC001-8</b>	Ø8	G1/8	62	42	G1/8	48.7	43	Ø4	90	181.9	107.7	45.2	74.2	133.2	34.6	9	0.2
<b>MD1-FC001-10</b>	Ø10	G1/8	67	42	G1/8	48.7	43	Ø4	90	181.9	107.7	45.2	74.2	133.2	34.6	9	0.2

# Series MD activated carbon filters

Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with Ø 6, 8 and 10 mm

Modular assembly

Bowl with technopolymer cover and bayonet-type mounting



- » Removal of oil, liquid and gas components from compressed air through the active carbons
- » Air quality in compliance with ISO 8573-1 standard, Class 1.7.1
- » Clogging visual indicator
- » Bowl locking system reducing the risk of accidents
- » Additional air intakes with the same characteristics of the inlet air (line)

Within a battery of filters the activated carbon version is placed at the end because it requires a pre-filtering like the coalescing filter. Given the characteristic of this filter, it is recommended to replace the filter element at least every 6 months or 1000 working hours.

The operating principle is based on the adsorption characteristic of the filtering element which is composed of extremely porous fibers placed on different layers. These fibers create a cross-linked and are thus able to adsorb wet parts and contaminants remaining in the passing air, for example oil vapours/smokes, as well as odours generated from these contaminants.

## GENERAL DATA

Construction	modular, compact with activated carbon filtering element
Materials	see TABLE OF MATERIALS (pag. 3/0.15.02)
Ports	With interchangeable cartridges: 1/8, 1/4 and 3/8 threaded or integrated with super-rapid fitting for tube with Ø 6, 8 and 10 mm
Mounting	vertical in-line; wall-mounting by means of through holes in the body or with a support bracket
Operating temperature	10°C ÷ 40°C (t max = 60°C)
Condensate drain	NOT PRESENT
Quality of delivered air according to ISO 8573-1 2010 standard	Class 1.7.1 (pre-filtering in Class 1.8.1 is recommended)
Operating pressure	0.3 ÷ 16 bar
Nominal flow	see FLOW DIAGRAMS on the following pages
Filtering element	active carbon
Residual oil content	< 0.003 mg/m³
Fluid	compressed air

## CODING EXAMPLE

MD	1	-	FCA	0	-	1/8
----	---	---	-----	---	---	-----

<b>MD</b>	SERIES
<b>1</b>	DIMENSION: 1 = 42 mm
<b>FCA</b>	ACTIVATED CARBON FILTER
<b>0</b>	CLOGGING VISUAL INDICATOR: 0 = not present 1 = present
<b>1/8</b>	PORTS (IN - OUT)*: = without ports 1/8 = G 1/8 1/4 = G 1/4 3/8 = G 3/8 6 = tube Ø6 8 = tube Ø8 10 = tube Ø10  * NOTE: if the inlet port is different from the outlet port, both values shall be indicated. Example: MD1-FCA0-1/8-1/4


3

TREATMENT

## Series MD activated carbon filters - materials

A = filter



B = filter with clogging visual indicator

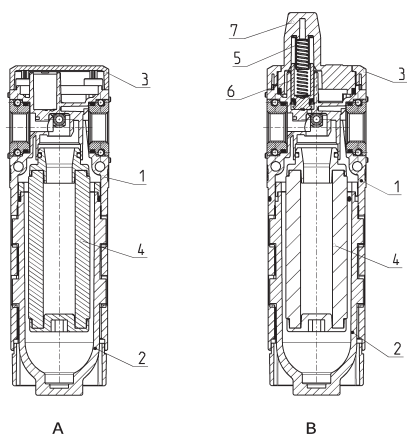

PARTS	MATERIALS
<b>1 = Body</b>	Polyamide
<b>2 = Tank</b>	Polycarbonate
<b>3 = Covering</b>	Polyamide
<b>4 = Filtering element</b>	Active carbons
<b>5 = Upper spring</b>	Stainless steel
<b>6 = Piston</b>	Anodized aluminium
<b>7 = Clogging visual indicator</b>	Polycarbonate
<b>Seals</b>	NBR



# FLOW DIAGRAMS

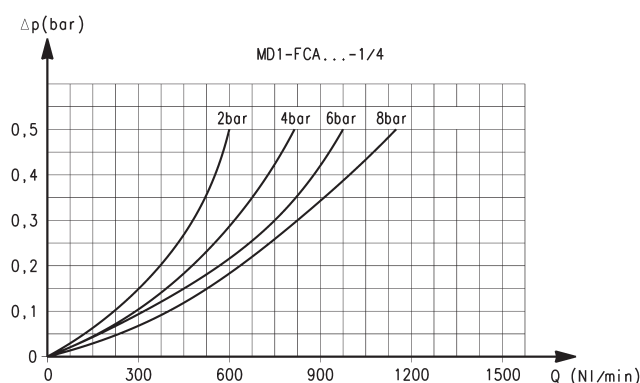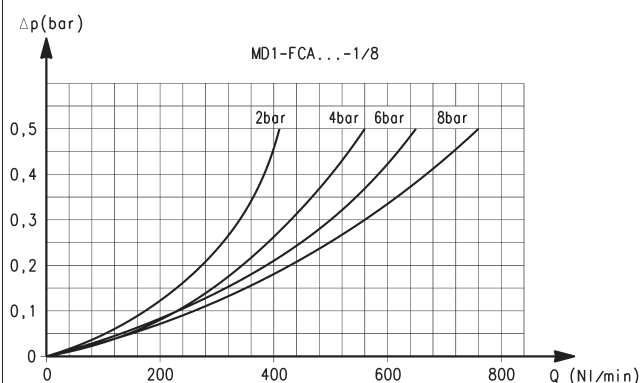


Ports with interchangeable 1/8 threaded cartridges

$\Delta p$  = Pressure drop  
 $Q$  = Flow

Ports with interchangeable 1/4 threaded cartridges

$\Delta p$  = Pressure drop  
 $Q$  = Flow



# FLOW DIAGRAMS

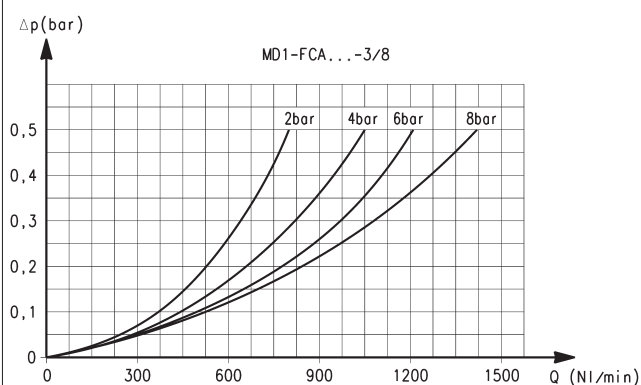

Ports with interchangeable 3/8 threaded cartridges

$\Delta p$  = Pressure drop  
 $Q$  = Flow



## Series MD activated carbon filters - dimensions

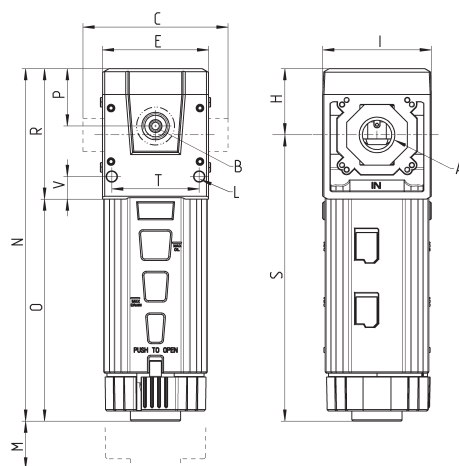

## DIMENSIONS

Mod.	A	B	C	E	H	I	L	M	N	O	P	R	S	T	V	Weight (Kg)
<b>MD1-FCA0</b>	-	G1/8	42	42	26.2	43	Ø4	90	139.7	88	22.7	51.7	113.5	34.6	9	0.2
<b>MD1-FCA0-1/8</b>	G1/8	G1/8	42	42	26.2	43	Ø4	90	139.7	88	22.7	51.7	113.5	34.6	9	0.2
<b>MD1-FCA0-1/4</b>	G1/4	G1/8	42	42	26.2	43	Ø4	90	139.7	88	22.7	51.7	113.5	34.6	9	0.2
<b>MD1-FCA0-3/8</b>	G3/8	G1/8	42	42	26.2	43	Ø4	90	139.7	88	22.7	51.7	113.5	34.6	9	0.2
<b>MD1-FCA0-6</b>	Ø6	G1/8	47	42	26.2	43	Ø4	90	139.7	88	22.7	51.7	113.5	34.6	9	0.2
<b>MD1-FCA0-8</b>	Ø8	G1/8	62	42	26.2	43	Ø4	90	139.7	88	22.7	51.7	113.5	34.6	9	0.2
<b>MD1-FCA0-10</b>	Ø10	G1/8	67	42	26.2	43	Ø4	90	139.7	88	22.7	51.7	113.5	34.6	9	0.2

## Series MD activated carbon filters with visual indicator - dimensions

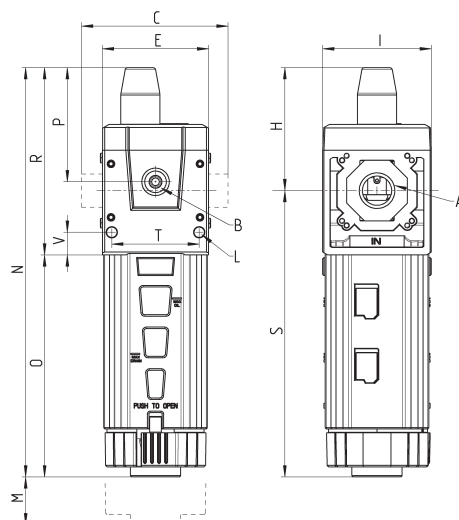

## DIMENSIONS

Mod.	A	B	C	E	H	I	L	M	N	O	P	R	S	T	V	Weight (Kg)
<b>MD1-FCA1</b>	-	G1/8	42	42	48.7	43	Ø4	90	162.2	88	45.2	74.2	113.5	34.6	9	0.2
<b>MD1-FCA1-1/8</b>	G1/8	G1/8	42	42	48.7	43	Ø4	90	162.2	88	45.2	74.2	113.5	34.6	9	0.2
<b>MD1-FCA1-1/4</b>	G1/4	G1/8	42	42	48.7	43	Ø4	90	162.2	88	45.2	74.2	113.5	34.6	9	0.2
<b>MD1-FCA1-3/8</b>	G3/8	G1/8	42	42	48.7	43	Ø4	90	162.2	88	45.2	74.2	113.5	34.6	9	0.2
<b>MD1-FCA1-6</b>	Ø6	G1/8	47	42	48.7	43	Ø4	90	162.2	88	45.2	74.2	113.5	34.6	9	0.2
<b>MD1-FCA1-8</b>	Ø8	G1/8	62	42	48.7	43	Ø4	90	162.2	88	45.2	74.2	113.5	34.6	9	0.2
<b>MD1-FCA1-10</b>	Ø10	G1/8	67	42	48.7	43	Ø4	90	162.2	88	45.2	74.2	113.5	34.6	9	0.2

# Series MD pressure regulators

New

Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with Ø 6, 8 and 10 mm  
Versions: single, combined with other functions, Manifold



- » Minimal pressure decreases
- » Knob with position lock
- » Tamper-proof system (lockable regulator)
- » With or without overpressure exhaust (relieving)
- » MANIFOLD version available
- » Version with by-pass valve available
- » Calibrated or locked versions available

Thanks to the flexibility given by the connection inserts, the regulator can be adjusted within a treatment group so that the regulation knob is in the front or lower position. Once the regulation is locked, it is possible to insert as many security locks through the 4 holes. The by-pass valve allows the fast exhaust of the air introduced. The different springs enable a more accurate adjustment of the pressure.

The Series MD offers multi-sector solutions that ensure saving in terms of installation time, space and costs. Thanks to the solution adopted for the pneumatic connection, it is possible to equip the same element with interchangeable cartridges which can be threaded or with an integrated super-rapid fitting, both in different sizes. Intermediate cartridges can be also integrated to join multiple functions or with derivation to draw air.

## GENERAL DATA

Construction	modular, compact with pre-formed diaphragm		
Materials	see TABLE OF MATERIALS (pag. 3/0.20.02)		
Ports	With interchangeable inserts: 1/8, 1/4 and 3/8 threaded, integrated with super-rapid fitting for tube with Ø 6, 8 and 10 mm		
Fixing	in-line; wall-mounting by means of through holes in the body or with a support bracket; panel mounting		
Operating temperature	-5°C ÷ 50°C up to 16 bar		
Inlet pressure	0 ÷ 16 bar		
Outlet pressure	0 ÷ 2 bar	0 ÷ 4 bar	
	0.5 ÷ 7 bar	0.5 ÷ 10 bar	
Overpressure exhaust	with relieving (standard) without relieving		
Nominal flow	see FLOW DIAGRAMS (pag. 3/0.20.03 and 3/0.20.05)		
Fluid	compressed air		

## CODING EXAMPLE

MD	1	-	R	T	0	0	-	1/4	-	■	-	●
----	---	---	---	---	---	---	---	-----	---	---	---	---


<b>MD</b>	SERIES
<b>1</b>	SIZE: 1 = G1/8, G1/4, G3/8, Ø6, Ø8, Ø10
<b>R</b>	TYPED OF REGULATOR: R = pressure regulator M = Manifold pressure regulator
<b>T</b>	OPERATING PRESSURE (1 bar = 14,5 psi): 0 = 0,5 ÷ 10 bar 2 = 0 ÷ 2 bar 4 = 0 ÷ 4 bar 7 = 0,5 ÷ 7 bar T = calibrated ** B = locked **
<b>0</b>	DESIGN TYPE: 0 = with relieving 1 = without relieving 2 = with relieving, VS version 3 = without relieving, VS version
<b>0</b>	PRESSURE GAUGE: 0 = without pressure gauge (with 1/8 port)
<b>1/4</b>	PORTS (IN - OUT)*: = without ports 1/8 = G1/8 1/4 = G1/4 3/8 = G3/8 6 = tube Ø6 8 = tube Ø8 10 = tube Ø10  * NOTE: if the inlet port is different from the outlet port, both values shall be indicated. Example: MD1-R000-1/8-1/4
<p>** NB: IF THE REGULATOR IS CALIBRATED OR LOCKED, AFTER THE PORTS ADD THE INLET PRESSURE "■" AND THE OUTLET PRESSURE "●"</p> <p>INLET PRESSURE: ■ = enter the SUPPLY pressure value</p> <p>OUTLET PRESSURE: ● = enter the OUTLET pressure value for the LOCKED regulator or the maximum value of the ADJUSTABLE pressure for the CALIBRATED regulator</p> <p>Example of a calibrated regulator with Inlet Pressure = 6.3 bar and Outlet Pressure = 4.5 bar Complete part number: MD1-RT00-1/4-6.3-4.5</p>	

3

TREATMENT


## Pressure regulators Series MD - materials

R = pressure regulator  
M = Manifold pressure regulator

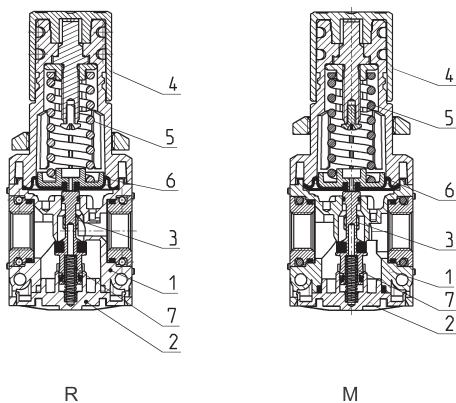


PARTS	MATERIALS
<b>1 = Body</b>	Polyamide
<b>2 = Valve holder plug</b>	Polyamide
<b>3 = Poppet</b>	Brass
<b>4 = Knob</b>	Polyamide
<b>5 = Upper spring</b>	Zinc-plated steel
<b>6 = Diaphragm</b>	NBR
<b>7 = Lower spring</b>	Stainless steel
<b>Seals</b>	NBR

# FLOW DIAGRAMS FOR MD1 PRESSURE REGULATORS - G1/8 ports

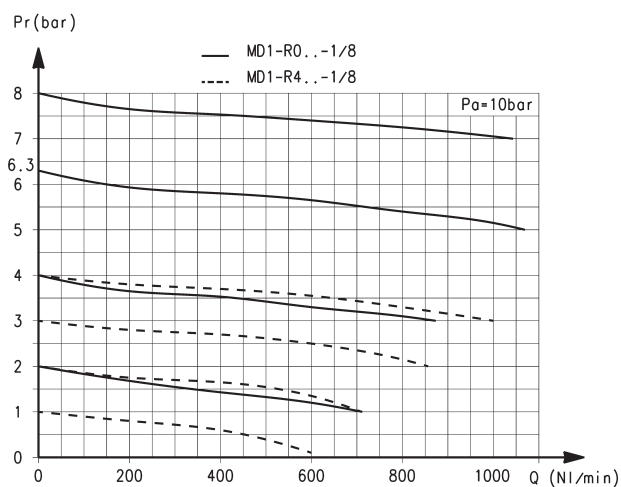

Pr = Regulated pressure  
Q = Flow


Pa = Inlet pressure

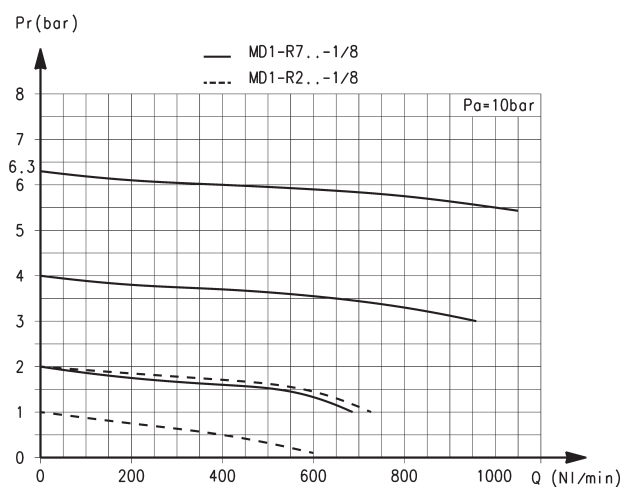

Pr = Regulated pressure  
Q = Flow


Pa = Inlet pressure

# FLOW DIAGRAMS FOR MD1 PRESSURE REGULATORS - G1/4 ports

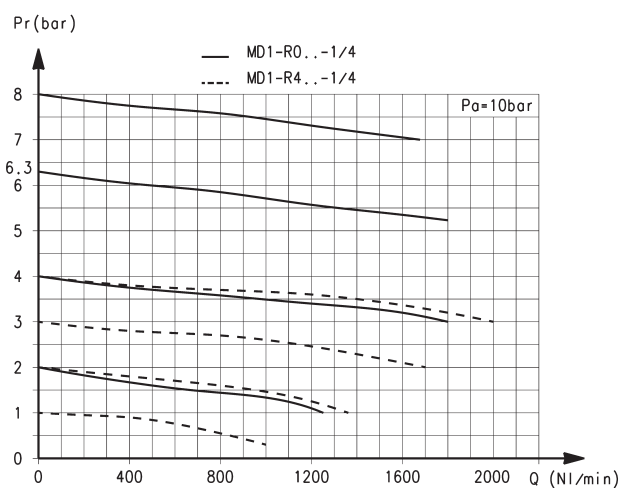

Pr = Regulated pressure  
Q = Flow


Pa = Inlet pressure

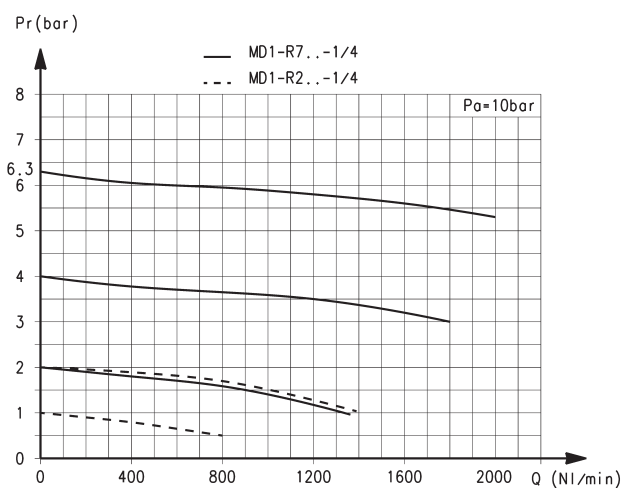

Pr = Regulated pressure  
Q = Flow


Pa = Inlet pressure

# FLOW DIAGRAMS FOR MD1 PRESSURE REGULATORS - G3/8 ports

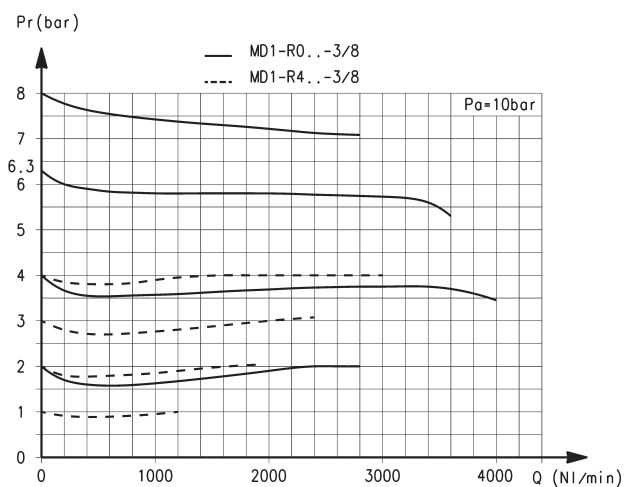

Pr = Regulated pressure  
Q = Flow

Pa = Inlet pressure

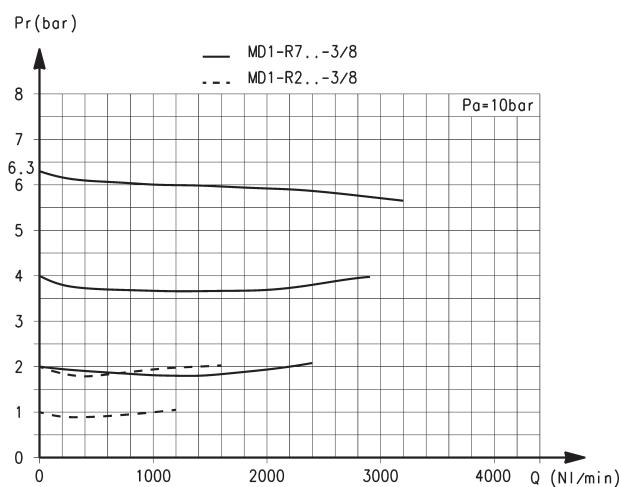

Pr = Regulated pressure  
Q = Flow

Pa = Inlet pressure




3

TREATMENT

## Series MD pressure regulators - dimensions





PR03 = regulator with relieving  
and by-pass valve  
PR04 = regulator without relieving  
and with by-pass valve

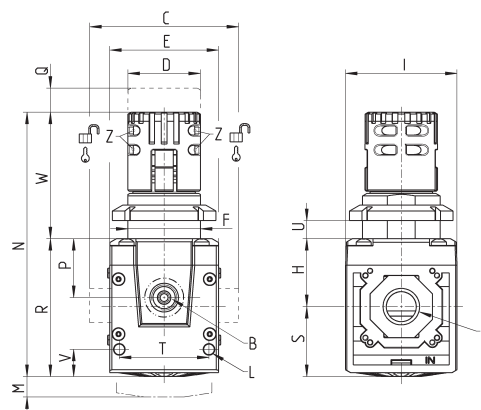

Mod.	A	B	C	D	E	F	H	I	L	M	N	P	Q	R	S	T	U	V	W	Z	Weight (Kg)
MD1-R000	-	G1/8	42	Ø28	42	M28X1,5	26.2	43	Ø4	16	102	22.7	4	53.2	27	34.6	0 ÷ 11	10.5	48.8	Ø3.2	0.2
MD1-R000-1/8	G1/8	G1/8	42	Ø28	42	M28X1,5	26.2	43	Ø4	16	102	22.7	4	53.2	27	34.6	0 ÷ 11	10.5	48.8	Ø3.2	0.2
MD1-R000-1/4	G1/4	G1/8	42	Ø28	42	M28X1,5	26.2	43	Ø4	16	102	22.7	4	53.2	27	34.6	0 ÷ 11	10.5	48.8	Ø3.2	0.2
MD1-R000-3/8	G3/8	G1/8	42	Ø28	42	M28X1,5	26.2	43	Ø4	16	102	22.7	4	53.2	27	34.6	0 ÷ 11	10.5	48.8	Ø3.2	0.2
MD1-R000-6	Ø6	G1/8	47	Ø28	42	M28X1,5	26.2	43	Ø4	16	102	22.7	4	53.2	27	34.6	0 ÷ 11	10.5	48.8	Ø3.2	0.2
MD1-R000-8	Ø8	G1/8	62	Ø28	42	M28X1,5	26.2	43	Ø4	16	102	22.7	4	53.2	27	34.6	0 ÷ 11	10.5	48.8	Ø3.2	0.2
MD1-R000-10	Ø10	G1/8	67	Ø28	42	M28X1,5	26.2	43	Ø4	16	102	22.7	4	53.2	27	34.6	0 ÷ 11	10.5	48.8	Ø3.2	0.2

# FLOW DIAGRAMS FOR MD1 PRESSURE REGULATORS - MANIFOLD

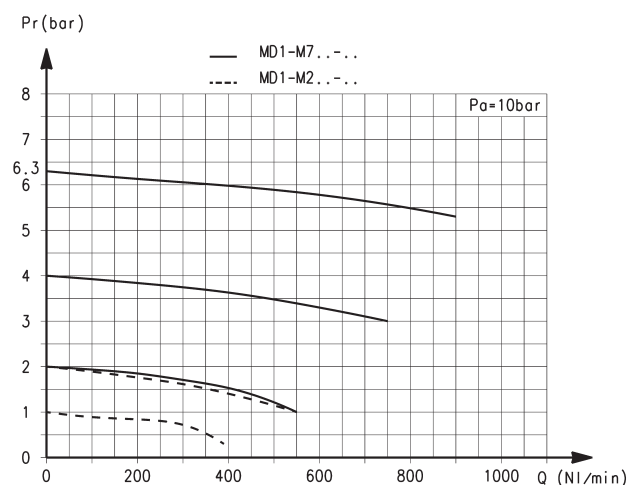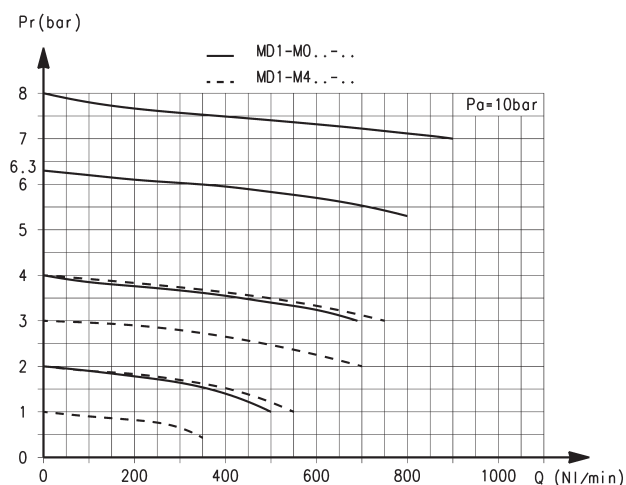

Pr = Regulated pressure  
Q = Flow

Pa = Inlet pressure

Pr = Regulated pressure  
Q = Flow

Pa = Inlet pressure

3

TREATMENT

## Series MD pressure regulators - dimensions





FR19 = Manifold regulator  
with relieving and without  
pressure gauge

FR21 = Manifold regulator  
without relieving and  
without pressure gauge

With the Manifold version it is possible to realize a battery of regulators which are fed by a single source of inlet pressure. Each regulator can be set up at any pressure (lower than the inlet pressure). The front or rear connection of each regulator allows to draw air at the pressure value set on the regulator itself.

There is no limit to the number of regulators that can be connected.

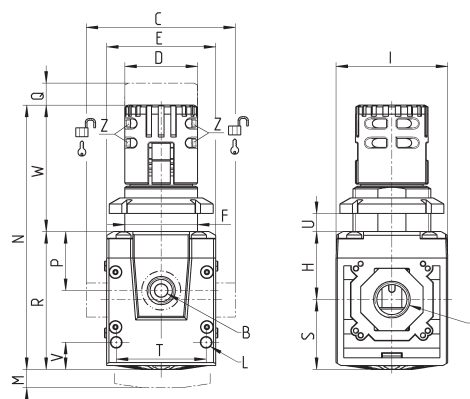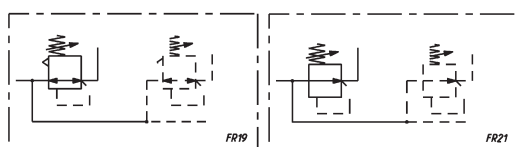

Mod.	A	B	C	D	E	F	H	I	L	M	N	P	Q	R	S	T	U	V	W	Z	Weight (Kg)
MD1-M000	-	G1/8	42	Ø28	42	M28X1,5	26.2	43	Ø4	16	102	22.7	4	53.2	27	34.6	0 ÷ 11	10.5	48.8	Ø3.2	0.2

3/0.20.05

Products designed for industrial applications.  
General terms and conditions for sale are available on [www.camozzi.com](http://www.camozzi.com).

# Series MD lubricators

New

Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with Ø 6, 8 and 10 mm

Modular assembly

Bowl with technopolymer cover and bayonet-type mounting



- » Regulation screw
- » Ability to refill the oil even with system under pressure
- » High flow
- » Check of the oil level through plastic cover openings
- » Bowl locking system reducing the risk of accidents
- » Additional air intakes with the same characteristics of the outlet air (line)

The lubricator allows the nebulization of lubricating oil which is necessary to the functioning of components in specific conditions of use.

By means of a regulation screw the amount of oil can be properly adjusted in order to avoid unnecessary overdoses.

3

TREATMENT

## GENERAL DATA

Construction	modular, compact
Materials	see TABLE OF MATERIALS (pag. 3/0.25.02)
Ports	with interchangeable cartridges: 1/8, 1/4 and 3/8 threaded or integrated with super-rapid fitting for tube with Ø 6, 8 and 10 mm
Oil capacity	40 cc
Oil refilling	even during use
Mounting	in vertical position by means of through holes in the body
Operating temperature	-5°C ÷ 50°C up to 16 bar
Oil for lubrication	use ISO VG32 oils. Once applied, the lubrication should never be interrupted.
Operating pressure	0 ÷ 16 bar
Min. air consumption for lubrication at 1 bar	15 NI/min
Min. air consumption for lubrication at 6 bar	25 NI/min
Nominal flow	see FLOW DIAGRAMS (pag 3/0.25.03)



# CODING EXAMPLE


MD	1	-	L	0	0	-	1/8
----	---	---	---	---	---	---	-----

<b>MD</b>	SERIES
<b>1</b>	DIMENSION: 1 = 42 mm
<b>L</b>	LUBRICATOR
<b>00</b>	DESIGN TYPE: 00 = oil mist with refill valve 10 = oil mist WITHOUT refill valve
<b>1/8</b>	PORTS (IN - OUT)*: = without ports 1/8 = G1/8 1/4 = G1/4 3/8 = G3/8 6 = tube Ø6 8 = tube Ø8 10 = tube Ø10  * NOTE: if the inlet port is different from the outlet port, both values shall be indicated. Example: MD1-L00-1/8-1/4

3


TREATMENT

## Series MD lubricators - materials

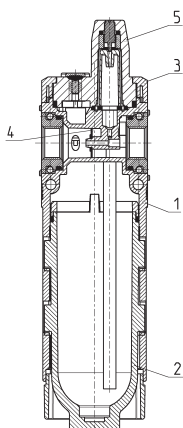


PARTS	MATERIALS
<b>1 = Body</b>	Polyamide
<b>2 = Tank</b>	Polycarbonate
<b>3 = Covering</b>	Polyamide
<b>4 = Diaphragm</b>	NBR
<b>5 = Visual Indicator</b>	Polycarbonate
<b>Seals</b>	NBR

## FLOW DIAGRAMS

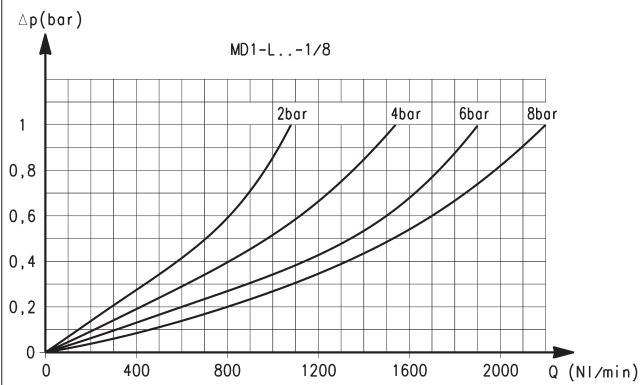

Ports with interchangeable 1/8 threaded cartridges

Δp = Pressure drop  
Q = Flow

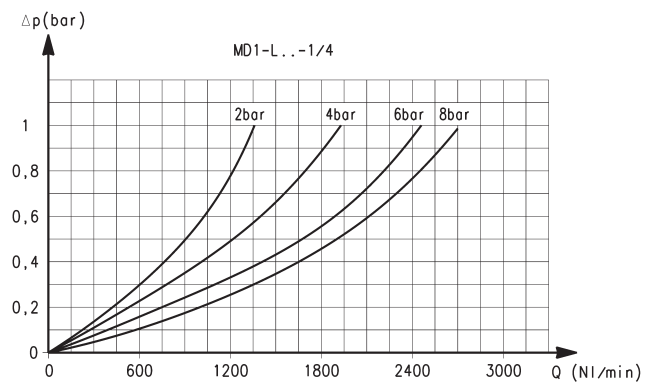


Ports with interchangeable 1/4 threaded cartridges

Δp = Pressure drop  
Q = Flow

3

TREATMENT



## FLOW DIAGRAMS

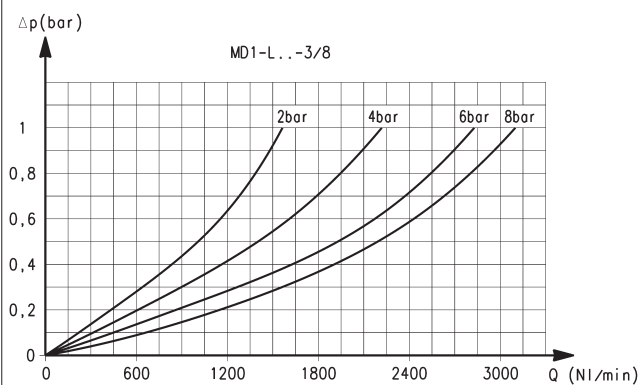

Ports with interchangeable 3/8 threaded cartridges

Δp = Pressure drop  
Q = Flow

## Series MD lubricators - dimensions

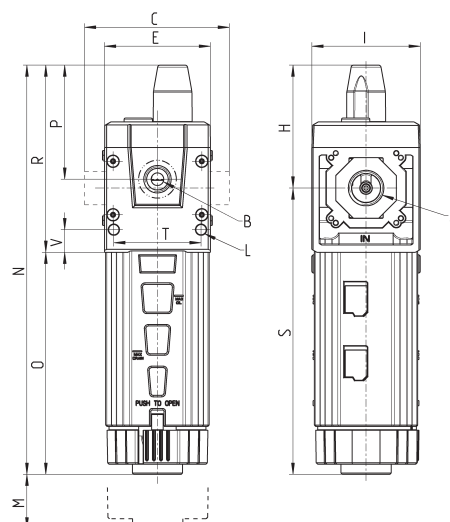

## DIMENSIONS

Mod.	A	B	C	E	H	I	L	M	N	O	P	R	S	T	V	Weight (Kg)
<b>MD1-L00</b>	-	G1/8	42	42	48.7	43	Ø4	75	162.2	88	45.2	74.2	113.5	34.6	9	0.2
<b>MD1-L00-1/8</b>	G1/8	G1/8	42	42	48.7	43	Ø4	75	162.2	88	45.2	74.2	113.5	34.6	9	0.2
<b>MD1-L00-1/4</b>	G1/4	G1/8	42	42	48.7	43	Ø4	75	162.2	88	45.2	74.2	113.5	34.6	9	0.2
<b>MD1-L00-3/8</b>	G3/8	G1/8	42	42	48.7	43	Ø4	75	162.2	88	45.2	74.2	113.5	34.6	9	0.2
<b>MD1-L00-6</b>	Ø6	G1/8	47	42	48.7	43	Ø4	75	162.2	88	45.2	74.2	113.5	34.6	9	0.2
<b>MD1-L00-8</b>	Ø8	G1/8	62	42	48.7	43	Ø4	75	162.2	88	45.2	74.2	113.5	34.6	9	0.2
<b>MD1-L00-10</b>	Ø10	G1/8	67	42	48.7	43	Ø4	75	162.2	88	45.2	74.2	113.5	34.6	9	0.2

New

# Series MD pressure filter-regulators

Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with Ø 6, 8 and 10 mm

Modular assembly

Bowl with technopolymer cover and bayonet-type mounting



- » Filtering between 25 µm or 5 µm
- » Minimum pressure drops
- » Knob with position lock
- » Tamper-proof system (lockable regulator)
- » Bowl locking system reducing the risk of accidents

**Series MD filter-regulators integrate filter and pressure reducer in one unit, thus reducing their dimensions.**

**The by-pass valve allows the fast exhaust of the air introduced. The different springs enable a more accurate adjustment of the pressure.**

Thanks to the solution adopted for the pneumatic connection, it is possible to equip the same element with interchangeable cartridges which can be threaded or with an integrated super-rapid fitting, both in different sizes. Intermediate cartridges can be also integrated to join multiple functions or with derivation to draw air.

3

TREATMENT

## GENERAL DATA


Construction	modular, compact with filtering element in HDPE
Materials	see TABLE OF MATERIALS (pag. 3/0.30.02)
Ports	with interchangeable cartridges: 1/8, 1/4 and 3/8 threaded or integrated with super-rapid fitting for tube with diameters of 6, 8 and 10 mm
Condensate capacity	24 cc
Mounting	in-line; wall-mounting by means of through holes in the body or with a support bracket; panel mounting
Operating temperature	-5°C ÷ 50°C up to 16 bar (with the dew point of the fluid lower than 2°C at the min. working temperature)
Porosity of the filtering element	25 µm (standard) 5 µm
Condensate drain	semi-automatic manual (standard); depressurization, protected; without drain with G1/8 port
Quality of delivered air according to ISO 8573-1 2010 standard	Class 6.8.4 with 5 µm filtering element Class 7.8.4 with 25 µm filtering element
Operating pressure	0,3 ÷ 16 bar
Nominal flow	see FLOW DIAGRAMS (pag. 3/0.30.03)
Fluid	compressed air

## CODING EXAMPLE

MD	1	-	FR	0	0	0	0	-	1/8
----	---	---	----	---	---	---	---	---	-----


<b>MD</b>	SERIES
<b>1</b>	DIMENSION: 1 = 42 mm
<b>FR</b>	FILTER-REGULATOR
<b>0</b>	FILTERING ELEMENT WITH DESIGN TYPE: 0 = 25 µm with relieving 1 = 5 µm with relieving 2 = 25 µm without relieving (with semiautomatic-manual drain only) 3 = 5 µm without relieving (with semiautomatic-manual drain only) 4 = 25 µm with relieving VS version 5 = 5 µm with relieving VS version 6 = 25 µm without relieving VS version (with semiautomatic-manual drain only) 7 = 5 µm without relieving VS version (with semiautomatic-manual drain only)
<b>0</b>	CONDENSATE DRAIN: 0 = semiautomatic-manual 5 = depressurization, protected 8 = without drain, with G1/8 port
<b>0</b>	OPERATING PRESSURE (1 bar = 14,5 psi): 0 = 0,5 ÷ 10 bar 2 = 0 ÷ 2 bar 4 = 0 ÷ 4 bar 7 = 0,5 ÷ 7 bar
<b>0</b>	PRESSURE GAUGE: 0 = without pressure gauge (with 1/8 port)
<b>1/8</b>	PORTS (IN - OUT)*: = without ports 1/8 = G1/8 1/4 = G1/4 3/8 = G3/8 6 = tube Ø6 8 = tube Ø8 10 = tube Ø10  * NOTE: if the inlet port is different from the outlet port, both values shall be indicated. Example: MD1-FR0000-1/8-1/4

## Series MD filter-regulators - materials

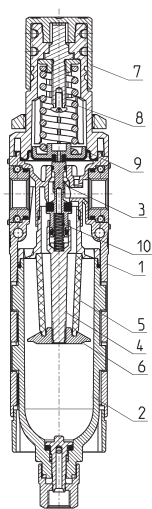

PARTS	MATERIALS
<b>1 = Body</b>	Polyamide
<b>2 = Tank</b>	Polycarbonate
<b>3 = Poppet</b>	Brass
<b>4 = Valve guide</b>	Polyacetal
<b>5 = Filtering element</b>	Polyethylene
<b>6 = Separation deflector</b>	Polyacetal
<b>7 = Knob</b>	Polyamide
<b>8 = Upper spring</b>	Zinc-plated steel
<b>9 = Diaphragm</b>	NBR
<b>10 = Lower spring</b>	Stainless steel
<b>Seals</b>	NBR

## FLOW DIAGRAMS

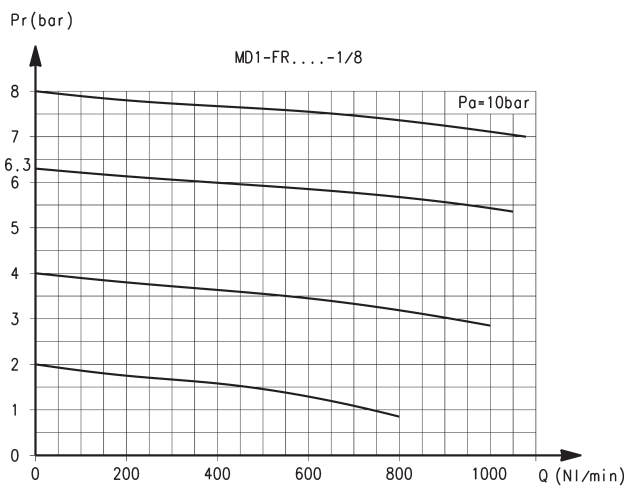


Ports with interchangeable G1/8 threaded cartridges

Pr = Regulated pressure

Q = Flow

Pa = Inlet pressure

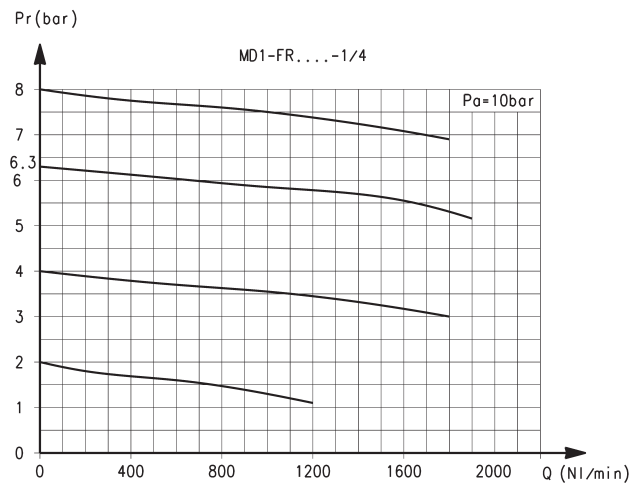

Ports with interchangeable G1/4 threaded cartridges

Pr = Regulated pressure


Q = Flow

Pa = Inlet pressure

3

TREATMENT

## FLOW DIAGRAMS

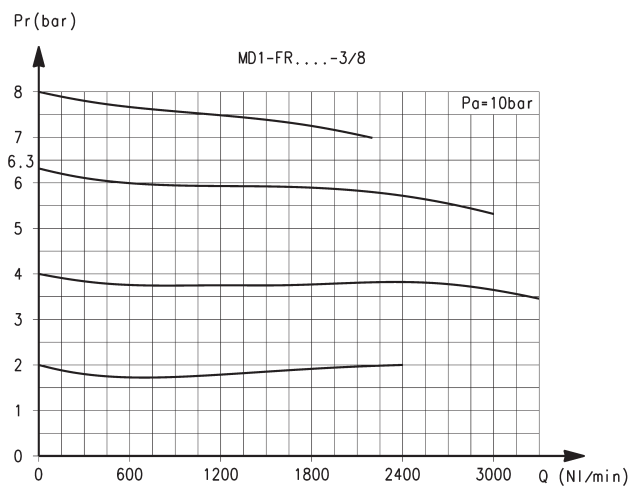


Ports with interchangeable G3/8 threaded cartridges

Pr = Regulated pressure

Q = Flow

Pa = Inlet pressure

## PNEUMATIC SYMBOLS

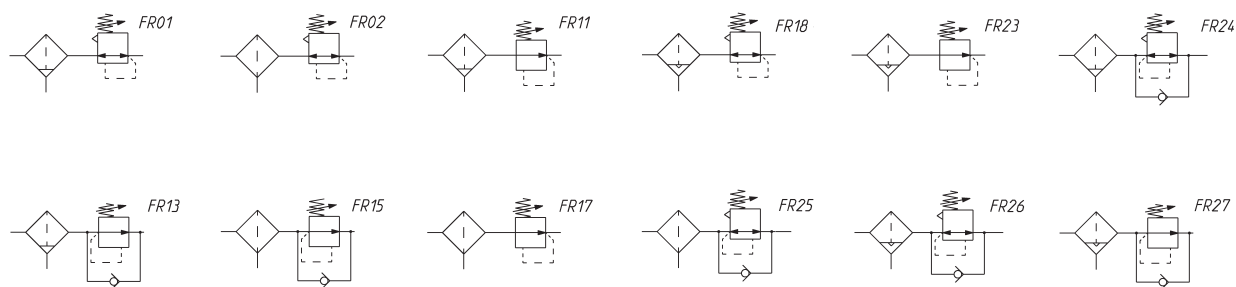

FR01 = filter-regulator with relieving and manual drain

FR02 = filter-regulator with relieving, without drain

FR11 = filter-regulator no relieving, with manual drain

FR13 = filter-regulator no relieving and by-pass valve, with manual drain

FR15 = filter-regulator without relieving, by-pass valve and manual drain

FR17 = filter-regulator without relieving and drain

FR18 = filter-reg. with relieving and automatic drain

FR23 = filter-reg. no relieving, with automatic drain


FR24 = filter-reg. with relieving, by-pass valve and manual drain

FR25 = filter-reg. with relieving and by-pass valve, no drain

FR26 = filter-reg. with relieving, by-pass valve, automatic drain

FR27 = filter-reg. without relieving and by-pass valve, with automatic drain

## Series MD filter-regulators - dimensions

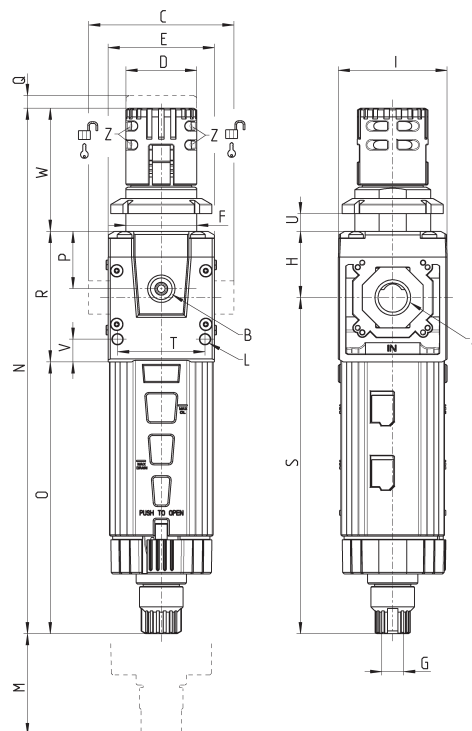

Mod.	A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q	R	S	T	U	V	W	Z	Weight (Kg)
<b>MD1-FR000</b>	-	G1/8	42	Ø28	42	M28X1,5	G1/8	26.2	43	Ø4	110	208.2	107.7	22.7	4	51.7	133.2	34.6	0 + 11	9	48.8	Ø3.2	0.2
<b>MD1-FR000-1/8</b>	G1/8	G1/8	42	Ø28	42	M28X1,5	G1/8	26.2	43	Ø4	110	208.2	107.7	22.7	4	51.7	133.2	34.6	0 + 11	9	48.8	Ø3.2	0.2
<b>MD1-FR000-1/4</b>	G1/4	G1/8	42	Ø28	42	M28X1,5	G1/8	26.2	43	Ø4	110	208.2	107.7	22.7	4	51.7	133.2	34.6	0 + 11	9	48.8	Ø3.2	0.2
<b>MD1-FR000-3/8</b>	G3/8	G1/8	42	Ø28	42	M28X1,5	G1/8	26.2	43	Ø4	110	208.2	107.7	22.7	4	51.7	133.2	34.6	0 + 11	9	48.8	Ø3.2	0.2
<b>MD1-FR000-6</b>	Ø6	G1/8	47	Ø28	42	M28X1,5	G1/8	26.2	43	Ø4	110	208.2	107.7	22.7	4	51.7	133.2	34.6	0 + 11	9	48.8	Ø3.2	0.2
<b>MD1-FR000-8</b>	Ø8	G1/8	62	Ø28	42	M28X1,5	G1/8	26.2	43	Ø4	110	208.2	107.7	22.7	4	51.7	133.2	34.6	0 + 11	9	48.8	Ø3.2	0.2
<b>MD1-FR000-10</b>	Ø10	G1/8	67	Ø28	42	M28X1,5	G1/8	26.2	43	Ø4	110	208.2	107.7	22.7	4	51.7	133.2	34.6	0 + 11	9	48.8	Ø3.2	0.2

New

# Series MD lockable isolation 3/2-way valves

Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with Ø 6, 8 and 10 mm

Modular

Manual, electro-pneumatic, servo-pilot and pneumatic control



- » Standard tamperproof lock-out (manual valve)
- » 24 V, 110 V or 230 V coils (see the section 2.2.35)
- » Solenoid valve with or without manual override available in different types
- » Additional air intakes with the same characteristics of the inlet air (line)

The Series MD offers multi-sector solutions that ensure saving in terms of installation time, space and costs. Series MD lockable isolation valves allow the inlet and exhaust of compressed air from the plant and can meet several application requirements.

The electric version can be equipped with different types of manual override (Push & Turn, Push-in, retaining lever). Moreover, a version without override is also available. The manually operated valve can be locked thanks to the use of padlocks.

3

TREATMENT

## GENERAL DATA

Construction	modular, compact, spool-type
Materials	see TABLE OF MATERIALS (pag. 3/0.35.02)
Ports	with interchangeable cartridges: 1/8, 1/4 and 3/8 threaded, integrated with super-rapid fitting for tube with Ø 6, 8 and 10 mm
Fixing	in-line; wall-mounting by means of through holes in the body or with a support bracket; panel-mounting (for manually operated version only)
Operating temperature	-5°C ÷ 50°C up to 16 bar
Operating pressure	Manual valve: -0,8 bar ÷ 10 bar Electro-pneumatic valve: 2 bar ÷ 10 bar Servopilot or pneumatic valve: -0,8 bar ÷ 10 bar (with pilot 2 ÷ 10 bar)
Nominal flow	see FLOW DIAGRAMS (pag. 3/0.35.03 e 3/0.35.04)
Nominal exhaust flow at 6 bar with $\Delta p = 1$ bar	850 Nl/min
Fluid	compressed air




## CODING EXAMPLE



MD	1	-	V	01	-	1/8
----	---	---	---	----	---	-----

<b>MD</b>	SERIES					
<b>1</b>	DIMENSION: 1 = 42 mm					
<b>V</b>	3/2-WAY VALVE					
<b>01</b>	DESIGN TYPE: 01 = lockable manual control 16 = electro-pneumatic control, Push & Turn manual override 16IL = electro-pneumatic control, bistable manual override, lever type 16IM = electro-pneumatic control, monostable manual override 16IT = electro-pneumatic control without manual override 36 = pneumatic control					
<b>1/8</b>	PORTS (IN - OUT)*: = without ports 1/8 = G1/8    6 = tube Ø6 1/4 = G1/4    8 = tube Ø8 3/8 = G3/8    10 = tube Ø10  * NOTE: if the inlet port is different from the outlet port, both values shall be indicated. Example: MD1-V01-1/8-1/4					

## TYPES OF MANUAL OVERRIDE

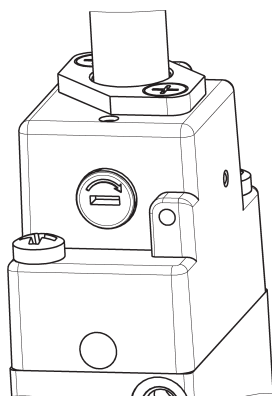


Push & Turn manual override

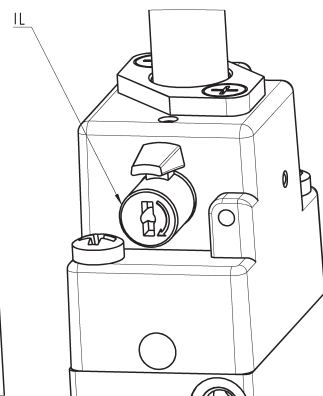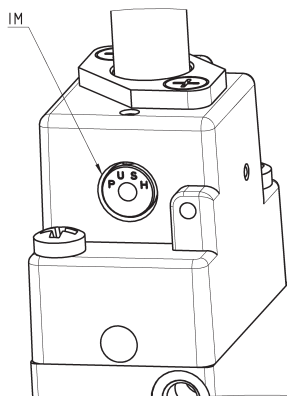

IL = bistable manual override, lever type  
IM = monostable manual override

## Series MD lockable isolation 3/2-way valves - materials

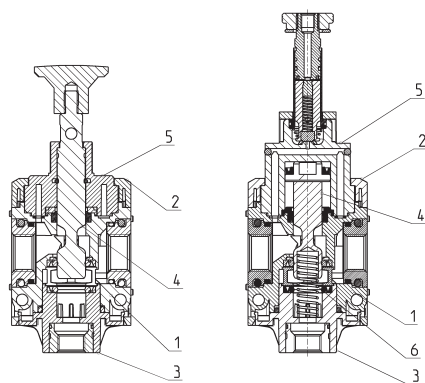


MD...-V01

MD...-V16


PARTS	MATERIALS
<b>1 = Body</b>	Polyamide
<b>2 = Covering</b>	Polyamide
<b>3 = Plug</b>	Polyamide
<b>4 = Spool</b>	Anodized aluminium
<b>5 = End-cover</b>	Polyamide
<b>6 = Lower spring</b>	Stainless steel
<b>Seals</b>	NBR

## FLOW DIAGRAMS for manually operated models

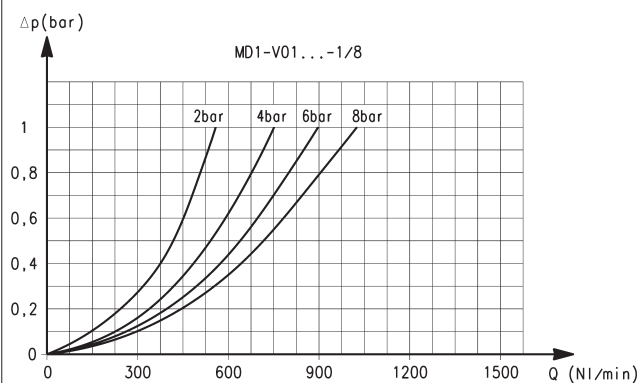

Ports with interchangeable G1/8 threaded cartridges


$\Delta p$  = Pressure drop  
Q = Flow

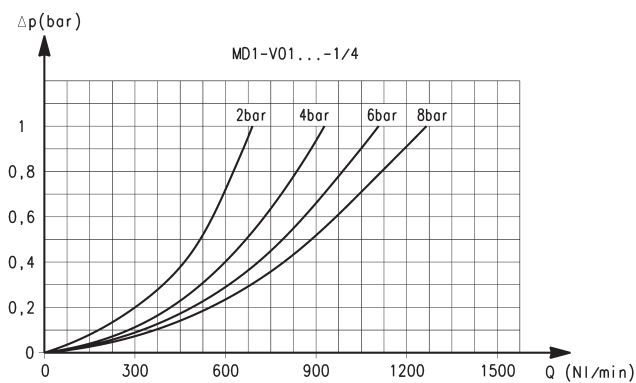

Ports with interchangeable G1/4 threaded cartridges

$\Delta p$  = Pressure drop  
Q = Flow


## FLOW DIAGRAM for manually operated models

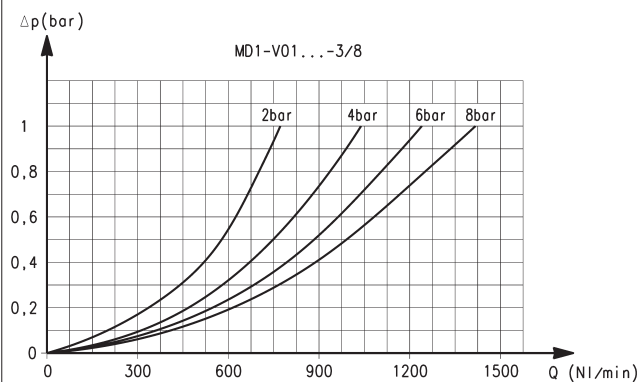

Ports with interchangeable G3/8 threaded cartridges


$\Delta p$  = Pressure drop  
Q = Flow

## FLOW DIAGRAMS for electro-pneumatically or pneumatically operated models

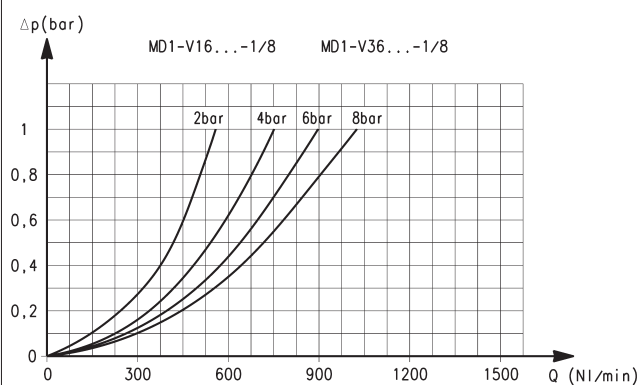

Ports with interchangeable G1/8 threaded cartridges


$\Delta p$  = Pressure drop  
Q = Flow

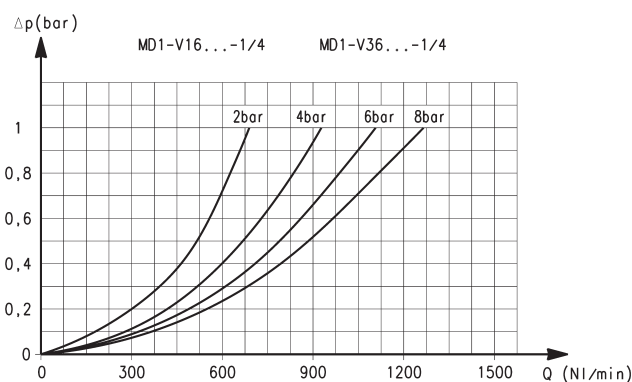

Ports with interchangeable G1/4 threaded cartridges

$\Delta p$  = Pressure drop  
Q = Flow

## FLOW DIAGRAM for electro-pneumatically or pneumatically operated models

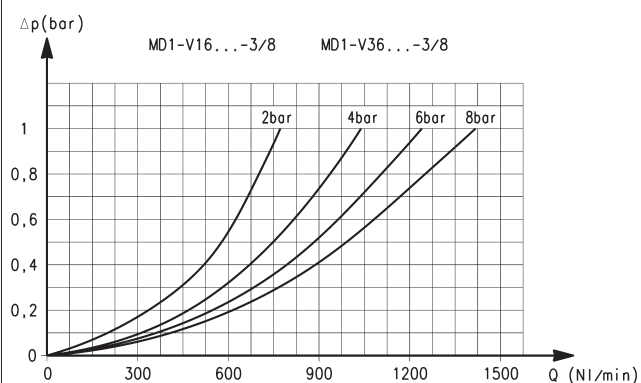

Ports with interchangeable G3/8 threaded cartridges

$\Delta p$  = Pressure drop  
Q = Flow

## Manually operated valves - dimensions

Fig. 1 = closed valve

Fig. 2 = open valve

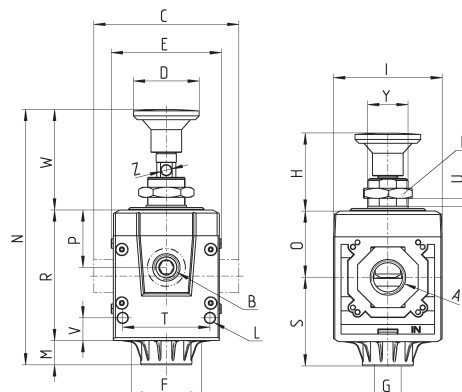



Fig.1



Fig.2

Mod.	A	B	C	D	E	F	G	H	I	K	L	M	N	O	P	R	S	T	U	V	W	Y	Z	Weight (Kg)
<b>MD1-V01</b>	-	G1/8	42	Ø26	42	28.5	G1/8	31	43	19	Ø4	9.5	101	26.2	22.7	51.7	35.1	34.6	0-8	9	39.8	M16X1	Ø4	0.2
<b>MD1-V01-1/8</b>	G1/8	G1/8	42	Ø26	42	28.5	G1/8	31	43	19	Ø4	9.5	101	26.2	22.7	51.7	35.1	34.6	0-8	9	39.8	M16X1	Ø4	0.2
<b>MD1-V01-1/4</b>	G1/4	G1/8	42	Ø26	42	28.5	G1/8	31	43	19	Ø4	9.5	101	26.2	22.7	51.7	35.1	34.6	0-8	9	39.8	M16X1	Ø4	0.2
<b>MD1-V01-3/8</b>	G3/8	G1/8	42	Ø26	42	28.5	G1/8	31	43	19	Ø4	9.5	101	26.2	22.7	51.7	35.1	34.6	0-8	9	39.8	M16X1	Ø4	0.2
<b>MD1-V01-6</b>	Ø6	G1/8	47	Ø26	42	28.5	G1/8	31	43	19	Ø4	9.5	101	26.2	22.7	51.7	35.1	34.6	0-8	9	39.8	M16X1	Ø4	0.2
<b>MD1-V01-8</b>	Ø8	G1/8	62	Ø26	42	28.5	G1/8	31	43	19	Ø4	9.5	101	26.2	22.7	51.7	35.1	34.6	0-8	9	39.8	M16X1	Ø4	0.2
<b>MD1-V01-10</b>	Ø10	G1/8	67	Ø26	42	28.5	G1/8	31	43	19	Ø4	9.5	101	26.2	22.7	51.7	35.1	34.6	0-8	9	39.8	M16X1	Ø4	0.2

## Electro-pneumatically operated valves - dimensions



\* = add:

- IL for the version with bistable manual override, lever type
- IM for the version with monostable manual override
- IT for the version without manual override

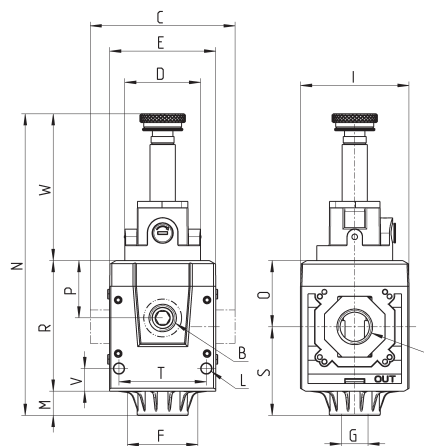

Mod.	A	B	C	D	E	F	G	I	L	M	N	O	P	R	S	T	V	W	Weight (Kg)
<b>MD1-V16*</b>	-	G1/8	42	Ø30	42	28.5	G1/8	43	Ø4	9.5	119.4	26.2	22.7	51.7	35.1	34.6	9	58.2	0.2
<b>MD1-V16*-1/8</b>	G1/8	G1/8	42	Ø30	42	28.5	G1/8	43	Ø4	9.5	119.4	26.2	22.7	51.7	35.1	34.6	9	58.2	0.2
<b>MD1-V16*-1/4</b>	G1/4	G1/8	42	Ø30	42	28.5	G1/8	43	Ø4	9.5	119.4	26.2	22.7	51.7	35.1	34.6	9	58.2	0.2
<b>MD1-V16*-3/8</b>	G3/8	G1/8	42	Ø30	42	28.5	G1/8	43	Ø4	9.5	119.4	26.2	22.7	51.7	35.1	34.6	9	58.2	0.2
<b>MD1-V16*-6</b>	Ø6	G1/8	47	Ø30	42	28.5	G1/8	43	Ø4	9.5	119.4	26.2	22.7	51.7	35.1	34.6	9	58.2	0.2
<b>MD1-V16*-8</b>	Ø8	G1/8	62	Ø30	42	28.5	G1/8	43	Ø4	9.5	119.4	26.2	22.7	51.7	35.1	34.6	9	58.2	0.2
<b>MD1-V16*-10</b>	Ø10	G1/8	67	Ø30	42	28.5	G1/8	43	Ø4	9.5	119.4	26.2	22.7	51.7	35.1	34.6	9	58.2	0.2

## Pneumatically operated valves - dimensions

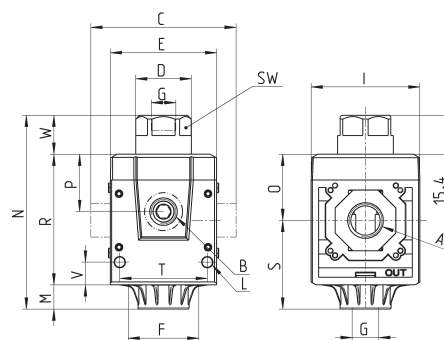

Mod.	A	B	C	D	E	F	G	I	L	M	N	O	P	R	S	T	V	W	SW	Weight (Kg)
<b>MD1-V36</b>	-	G1/8	42	Ø22	42	28.5	G1/8	43	Ø4	9.5	76.6	26.2	22.7	51.7	35.1	34.6	9	15.4	20	0.2
<b>MD1-V36-1/8</b>	G1/8	G1/8	42	Ø22	42	28.5	G1/8	43	Ø4	9.5	76.6	26.2	22.7	51.7	35.1	34.6	9	15.4	20	0.2
<b>MD1-V36-1/4</b>	G1/4	G1/8	42	Ø22	42	28.5	G1/8	43	Ø4	9.5	76.6	26.2	22.7	51.7	35.1	34.6	9	15.4	20	0.2
<b>MD1-V36-3/8</b>	G3/8	G1/8	42	Ø22	42	28.5	G1/8	43	Ø4	9.5	76.6	26.2	22.7	51.7	35.1	34.6	9	15.4	20	0.2
<b>MD1-V36-6</b>	Ø6	G1/8	47	Ø22	42	28.5	G1/8	43	Ø4	9.5	76.6	26.2	22.7	51.7	35.1	34.6	9	15.4	20	0.2
<b>MD1-V36-8</b>	Ø8	G1/8	62	Ø22	42	28.5	G1/8	43	Ø4	9.5	76.6	26.2	22.7	51.7	35.1	34.6	9	15.4	20	0.2
<b>MD1-V36-10</b>	Ø10	G1/8	67	Ø22	42	28.5	G1/8	43	Ø4	9.5	76.6	26.2	22.7	51.7	35.1	34.6	9	15.4	20	0.2

# Series MD soft start valves

New

Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with Ø 6, 8 and 10 mm  
Modular assembly



- » Security function to maintain the command sequence
- » Opening of the main air path at about 50% of the value of the inlet pressure
- » Pressure switches available on request
- » Additional air intakes with the same characteristics of the outlet air (line)

The soft start valves are used to avoid the sudden movement of pneumatic actuators. Feeding them pneumatically is enough to begin the phase of the pressure gradual increase in the system. By means of a regulation screw, it is possible to determine the time the valve needs to reach the 50% of the inlet pressure. Once this value is reached, the valve opens completely the passage.

The blanked connection on the upper side allows either the time increase to fill the system through a small additional volume or the connection of a pressure switch.

3

TREATMENT

## GENERAL DATA

Construction	modular, compact, poppet-type
Materials	see TABLE OF MATERIALS (pag. 3/0.40.02)
Ports	with interchangeable cartridges: 1/8, 1/4 and 3/8 threaded, integrated with super-rapid fitting for tube with Ø 6, 8 and 10 mm
Fixing	in-line; wall-mounting by means of through hole in the body or with a support bracket
Operating temperature	-5°C ÷ 50°C
Operating pressure	2 ÷ 10 bar
Nominal flow at 6 bar with ΔP 1 bar	MD1-AV-1/8 = 1000 NI/min MD1-AV-1/4 = 1350 NI/min MD1-AV-3/8 = 1500 NI/min
Fluid	compressed air


New

## CODING EXAMPLE

MD	1	-	AV	-	1/8
----	---	---	----	---	-----



<b>MD</b>	SERIES
<b>1</b>	DIMENSION: 1 = 42 mm
<b>AV</b>	SOFT START VALVE
<b>1/8</b>	PORTS (IN - OUT)*: = without ports 1/8 = G1/8 1/4 = G1/4 3/8 = G3/8 6 = tube Ø6 8 = tube Ø8 10 = tube Ø10  * NOTE: if the inlet port is different from the outlet port, both values shall be indicated. Example: MD1-AV-1/8-1/4

## Series MD soft start valves - materials



PARTS	MATERIALS
<b>1 = Body</b>	Polyamide
<b>2 = Covering</b>	Polyamide
<b>3 = Plug</b>	Polyamide
<b>4 = Poppet</b>	Brass
<b>5 = Spring</b>	Stainless steel
<b>Seals</b>	NBR

## MD1 DIAGRAMS FOR PRESSURISATION TIMES

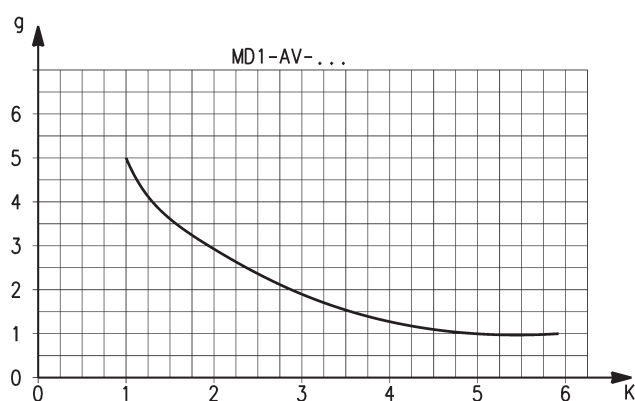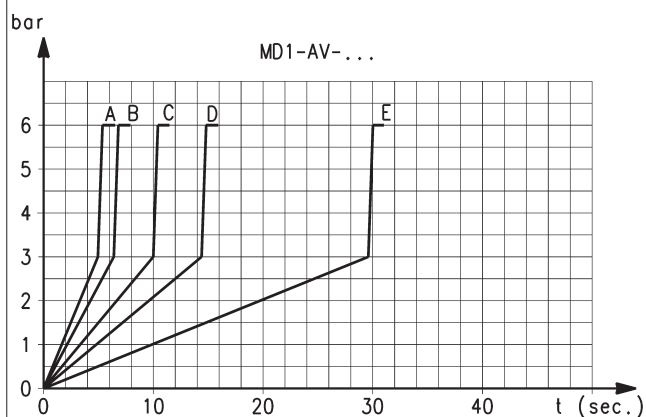

Pressurisation times as to the number of turns of the regulation screw, with downstream volume of 5 litres. A = 5 turns - B = 4 turns - C = 3 turns - D = 2 turns - E = 1 turn. K = number of turns of the regulation screw required to obtain the required pressurisation time with an inlet pressure of 6 bar. Variations of the inlet pressure can cause deviations of the pressure time by  $\pm 20\%$ .  $K = t/V$  where: V = volume of the downstream system in litres; t = desired pressuring time in seconds.


EXAMPLE:  
V = 5 litres  
t = 16 seconds  
 $K = 16/5 = 3,2$

Using in the graph this value K, the number of turns of the regulation screw will be approx. 0,8.

3

TREATMENT

## Series MD soft start valves - dimensions

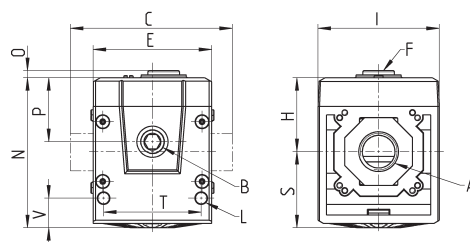

Mod.	A	B	C	E	F	H	I	L	N	O	P	S	T	V	Weight (Kg)
MD1-AV	-	G1/8	42	42	G1/8	26.2	43	Ø4	53.2	2.5	22.7	27	34.6	10.5	0.2
MD1-AV-1/8	G1/8	G1/8	42	42	G1/8	26.2	43	Ø4	53.2	2.5	22.7	27	34.6	10.5	0.2
MD1-AV-1/4	G1/4	G1/8	42	42	G1/8	26.2	43	Ø4	53.2	2.5	22.7	27	34.6	10.5	0.2
MD1-AV-3/8	G3/8	G1/8	42	42	G1/8	26.2	43	Ø4	53.2	2.5	22.7	27	34.6	10.5	0.2
MD1-AV-6	Ø6	G1/8	47	42	G1/8	26.2	43	Ø4	53.2	2.5	22.7	27	34.6	10.5	0.2
MD1-AV-8	Ø8	G1/8	62	42	G1/8	26.2	43	Ø4	53.2	2.5	22.7	27	34.6	10.5	0.2
MD1-AV-10	Ø10	G1/8	67	42	G1/8	26.2	43	Ø4	53.2	2.5	22.7	27	34.6	10.5	0.2



# Series MD take-off blocks

Module with interchangeable cartridges:  
threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube  
with Ø 6, 8 and 10 mm (5-way version)  
Intermediate joining cartridge (3-way version)

- » Compact design
- » Utilities orientation




The take-off module enables to draw air from the air treatment group, both in middle and end position. The same operation, although in a more limited way, can be carried out with the intermediate cartridge.


## GENERAL DATA

Construction	modular, compact
Materials	see TABLE OF MATERIALS (pag. 3/0.45.02)
Ports - Take-off block	with interchangeable cartridges: 1/8, 1/4 and 3/8 threaded or integrated with super-rapid fitting for tube with Ø 6, 8 and 10 mm
Ports - Joining cartridge with derivation	3/8
Derivations - Take-off block	4x 1/8
Derivations - Joining cartridge	2x 1/8
Fixing	in-line; wall-mounting by means of through holes in the body or with a support bracket
Operating temperature	-5°C ÷ 50°C
Operating pressure	0 ÷ 16 bar
Nominal flow at 6 bar with $\Delta p = 1$ bar	MD1-B00-1/8 = 1300 NI/min MD1-B00-1/4 = 2300 NI/min MD1-B00-3/8 = 3400 NI/min
Fluid	compressed air

CODING EXAMPLE						
MD	1	-	B	00	-	1/8
MD	SERIES					
1	DIMENSION: 1 = 42 mm					
B	TAKE-OFF BLOCK					
00	DESIGN TYPE: 00 = standard derivation					
1/8	PORTS (IN - OUT)*: = without ports 1/8 = G1/8 1/4 = G1/4 3/8 = G3/8 6 = tube Ø6 8 = tube Ø8 10 = tube Ø10  * NOTE: if the inlet port is different from the outlet port, both values shall be indicated. Example: MD1-B00-1/8-1/4					

Series MD take-off block - materials													
													
<table><tr><th>PARTS</th><th>MATERIALS</th></tr><tr><td>1 = Body</td><td>Polyamide</td></tr><tr><td>2 = Covering</td><td>Polyamide</td></tr><tr><td>3 = Plug</td><td>Polyamide</td></tr><tr><td>4 = Sphere</td><td>Stainless steel</td></tr><tr><td>Seals</td><td>NBR</td></tr></table>		PARTS	MATERIALS	1 = Body	Polyamide	2 = Covering	Polyamide	3 = Plug	Polyamide	4 = Sphere	Stainless steel	Seals	NBR
PARTS	MATERIALS												
1 = Body	Polyamide												
2 = Covering	Polyamide												
3 = Plug	Polyamide												
4 = Sphere	Stainless steel												
Seals	NBR												

## Series MD take-off block - dimensions

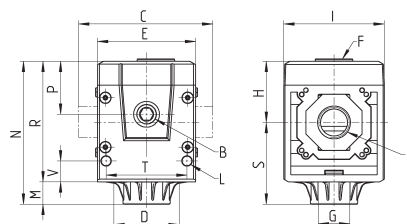


## DIMENSIONS

Mod.	A	B	C	D	E	F	G	H	I	L	M	N	P	R	S	T	V	Weight (Kg)
<b>MD1-B00</b>	-	G1/8	42	28.5	42	G1/8	G1/8	26.2	43	Ø4	9.5	61.2	22.7	51.7	35.1	34.6	9	0.2
<b>MD1-B00-1/8</b>	G1/8	G1/8	42	28.5	42	G1/8	G1/8	26.2	43	Ø4	9.5	61.2	22.7	51.7	35.1	34.6	9	0.2
<b>MD1-B00-1/4</b>	G1/4	G1/8	42	28.5	42	G1/8	G1/8	26.2	43	Ø4	9.5	61.2	22.7	51.7	35.1	34.6	9	0.2
<b>MD1-B00-3/8</b>	G3/8	G1/8	42	28.5	42	G1/8	G1/8	26.2	43	Ø4	9.5	61.2	22.7	51.7	35.1	34.6	9	0.2
<b>MD1-B00-6</b>	Ø6	G1/8	47	28.5	42	G1/8	G1/8	26.2	43	Ø4	9.5	61.2	22.7	51.7	35.1	34.6	9	0.2
<b>MD1-B00-8</b>	Ø8	G1/8	62	28.5	42	G1/8	G1/8	26.2	43	Ø4	9.5	61.2	22.7	51.7	35.1	34.6	9	0.2
<b>MD1-B00-10</b>	Ø10	G1/8	67	28.5	42	G1/8	G1/8	26.2	43	Ø4	9.5	61.2	22.7	51.7	35.1	34.6	9	0.2

## Intermediate joining cartridge with derivation Mod. MD1-B

The kit is supplied with:  
1x intermediate joining cartridge with derivation  
4x zinc-plated white special screws Ø4,5 TC/RC

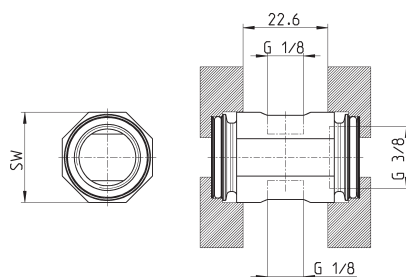



Mod.

**MD1-B**

## ACCESSORIES FOR SERIES MD



Threaded cartridges


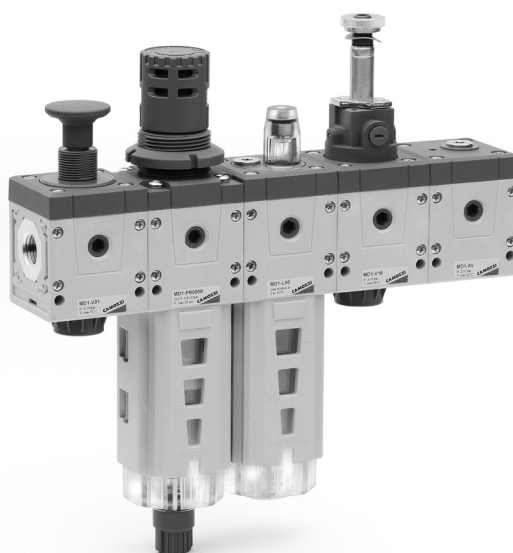
Integrated cartridges with  
super-rapid fittingIntermediate joining  
cartridge Mod. MD1-CScrews for wall mounting  
Mod. MD1-DRear bracket  
Mod. MD1-ST/1Mounting bracket  
Mod. C114-STMounting bracket  
Mod. C114-ST/1Mounting bracket  
Mod. C114-ST/2

New

### Threaded cartridges Mod. MD1-A-...



The kit is supplied with:  
2x nickel-plated threaded cartridges  
4x special white zinc-plated screws Ø4,5 TC/RC



#### DIMENSIONS


Mod.	A
<b>MD1-A-1/8</b>	G1/8
<b>MD1-A-1/4</b>	G1/4
<b>MD1-A-3/8</b>	G3/8

New

### Integrated cartridges with super-rapid fitting Mod. MD1-A-...



The kit is supplied with:  
2x integrated nickel-plated cartridges with super-rapid fitting  
4x special white zinc-plated screws Ø4,5 TC/RC



#### DIMENSIONS


Mod.	A	B	C
<b>MD1-A-6</b>	Ø6	12.7	8.5
<b>MD1-A-8</b>	Ø8	14.2	10
<b>MD1-A-10</b>	Ø10	16.5	12.5

New

### Intermediate joining cartridge Mod. MD1-C



The kit is supplied with:  
1x intermediate joining cartridge  
4x special white zinc-plated screws Ø4,5 TC/RC



Mod.

**MD1-C**

3/0.49.02

New

## Screws for wall mounting Mod. MD1-D

The kit is supplied with:  
2x white zinc-plated screws M4x50




Mod.

MD1-D

New

## Mounting bracket Mod. MD1-ST/1

The kit is supplied with:  
1x zinc-plated bracket  
2x white zinc-plated screws M4x50

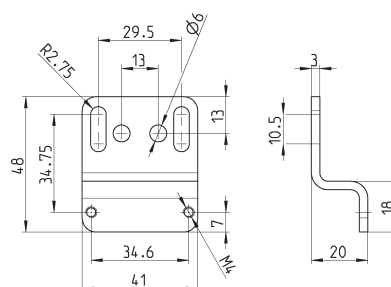



Mod.

MD1-ST

## Mounting bracket Mod. C114-ST

For regulators and filter-regulators (G1/4 - G1/8)

The kit is supplied with:  
1x zinc-plated steel bracket

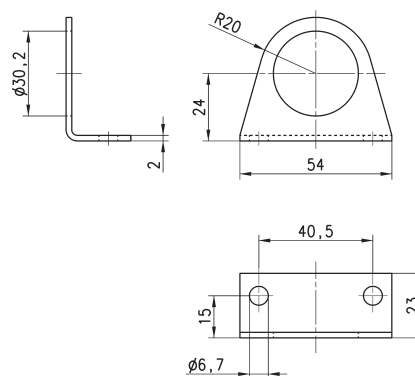

Mod.


C114-ST



### Mounting bracket Mod. C114-ST/1

For regulators and filter-regulators  
(G1/4 - G1/8)

The kit is supplied with:  
1x zinc-plated steel bracket

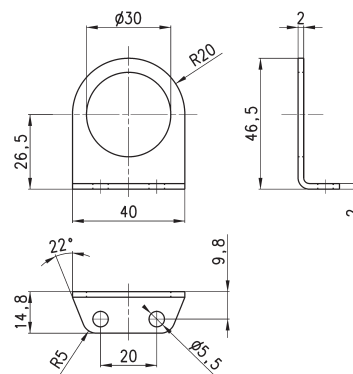


Mod.

**C114-ST/1**


### Mounting bracket Mod. C114-ST/2

For regulators and filter-regulators  
(G1/4 - G1/8)

The kit is supplied with:  
1x zinc-plated steel bracket

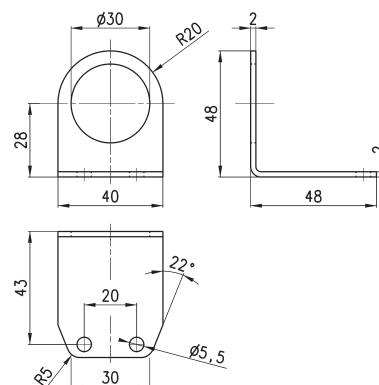


Mod.

**C114-ST/2**

# Series MD assembled FRL

New

Ports with interchangeable cartridges: threaded (1/8, 1/4, 3/8) or integrated with super-rapid fitting for tube with Ø 6, 8 and 10 mm  
Modular assembly

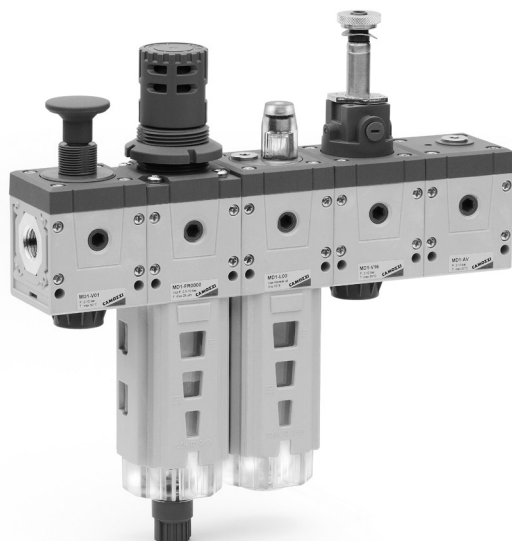

- » Compact design
- » Optimized dimensions
- » Great reliability
- » Easy and quick maintenance
- » Reduced weight
- » Quick fixing
- » Wide range of functions
- » Additional air intakes

3

TREATMENT

The Series MD offers multi-sector solutions that ensure saving in terms of installation time, space and costs. The various functions can be connected by means of intermediate junctioning cartridges. The regulator and the valves can be adjusted so as to have the regulation devices or the actuation in front or lower position. There are different types of wall mounting available.

Thanks to the solution adopted for the pneumatic connection, it is possible to equip the same element with interchangeable cartridges which can be threaded or with an integrated super-rapid fitting, both in different sizes. Intermediate cartridges can be also integrated to join multiple functions or with derivation to draw air.

## GENERAL DATA

<b>Construction</b>	modular, compact
<b>Materials</b>	see catalogue pages referring to the single component
<b>Ports</b>	with interchangeable cartridges: 1/8, 1/4 and 3/8 threaded or integrated with super-rapid fitting for tube with Ø 6, 8 and 10 mm
<b>Fixing</b>	vertical in-line; wall-mounting by means of through holes in the body or with a support bracket; panel mounting
<b>Operating temperature</b>	-5°C + 50°C up to 16 bar (according to the single component characteristics)




## CONFIGURATION OF SERIES MD ASSEMBLED GROUPS

TO CONFIGURE THE SERIES MD ASSEMBLED GROUPS, USE THE HERE BELOW EXAMPLE AND THE RELATED LEGEND ON PAGE 3/0.50.03.

Configuration of the assembled group in the drawing below:

MD1-V01+A26F000R000L00V16-8

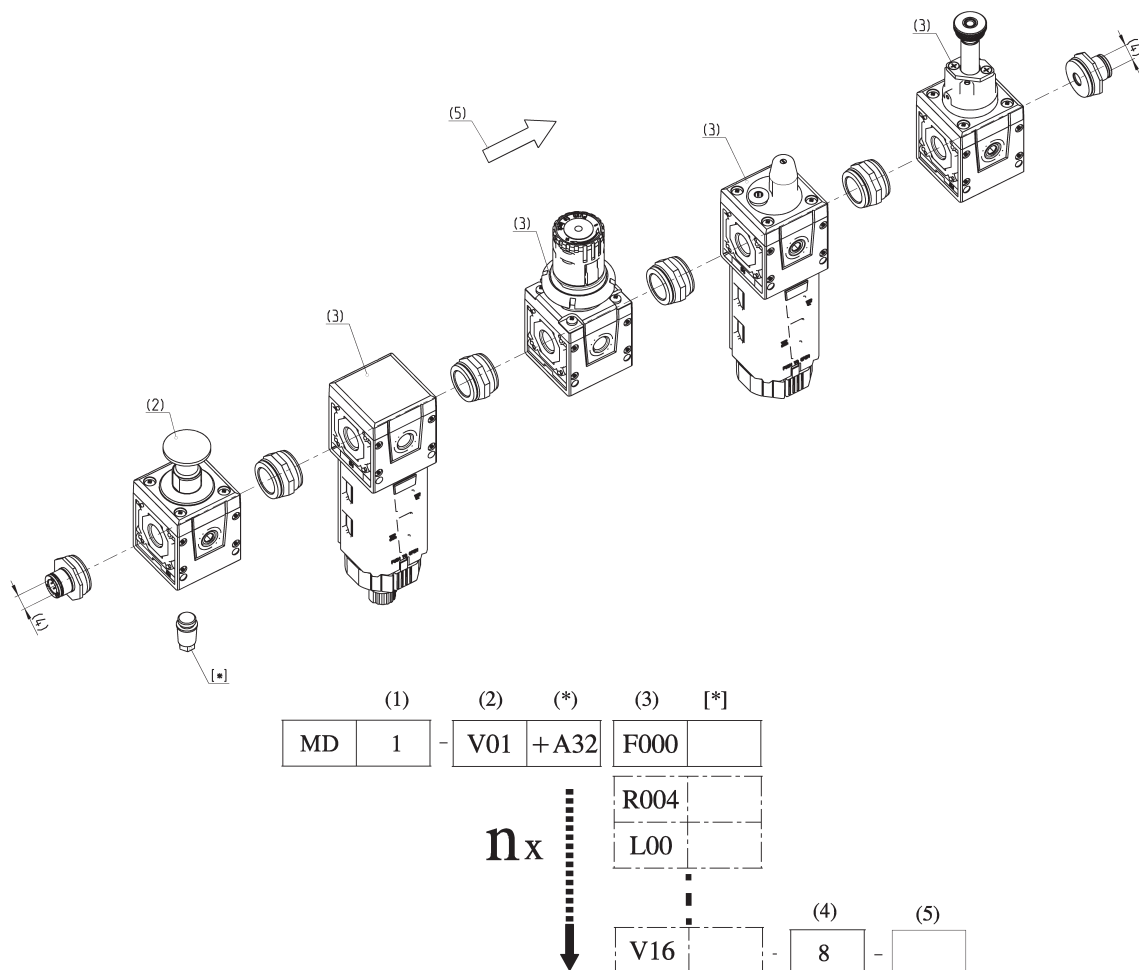

## CONFIGURATOR OF SERIES MD ASSEMBLED GROUPS

MD	1	-	V01	F000	R004	L00	V16	-	8	-	
----	---	---	-----	------	------	-----	-----	---	---	---	--

MD		SERIES
1	( 1 )	DIMENSION: 1 = 42 mm
-		
V01	( 2 )	<p>MODULE + [ * ] (to configure the modules, see the single components pages):</p> <p>F... = Filter  FC... = Coalescing filter  FCA... = Activated carbons filter  R... = Pressure regulator  L... = Lubricator  FR... = Filter-Regulator  V... = Lockable isolation valve  AV... = Soft start valve  B... = Take-off block</p> <p>[ * ] The following ACCESSORIES can be added after every single module:</p> <p>REGULATOR, FILTER-REGULATOR AND MANIFOLD REGULATOR  +A01 = M043-P04 (pressure gauge)  +A02 = M043-P06 (pressure gauge)  +A03 = M043-P10 (pressure gauge)  +A04 = M043-P12 (pressure gauge)  +A05 = SWCN-P10-P3-2 (pressure switch)  +A06 = SWCN-P10-P4-2 (pressure switch)  +A07 = SWCN-P10-P4-M (pressure switch)  +A08 = PG010-PB-1/8 (pressure gauge)</p> <p>LOCKABLE ISOLATION VALVE ...V01 / V16 / V36  +A25 = 2901 1/8 (silencier)  +A26 = 2921 1/8 (silencier) - recommended choice  +A27 = 2931 1/8 (silencier)  +A28 = 2938 1/8 (silencier)  +A01 = M043-P04 (pressure gauge)  +A02 = M043-P06 (pressure gauge)  +A03 = M043-P10 (pressure gauge)  +A04 = M043-P12 (pressure gauge)  +A05 = SWCN-P10-P3-2 (pressure switch)  +A06 = SWCN-P10-P4-2 (pressure switch)  +A07 = SWCN-P10-P4-M (pressure switch)  +A08 = PG010-PB-1/8 (pressure gauge)</p> <p>SOFT START VALVE AND 5-WAY TAKE-OFF BLOCK  +A15 = PM11-NC (pressure switch mounted on top)  +A16 = PM11-NA (pressure switch mounted on top)  +A17 = PM681-1 (pressure switch mounted on top)  +A18 = PM681-3 (pressure switch mounted on top)  +A19 = PM11-SC + S2520 1/8-1/4 (pressure switch with fitting mounted on top)  +A05 = SWCN-P10-P3-2 (front mounted pressure switch)  +A06 = SWCN-P10-P4-2 (front mounted pressure switch)  +A07 = SWCN-P10-P4-M (front mounted pressure switch)  +A08 = PG010-PB-1/8 (front mounted pressure switch)</p> <p>INTERMEDIATE JOINING CARTRIDGE WITH DERIVATION (MD1-B)  +A17 = PM681-1 (pressure switch mounted on top)  +A18 = PM681-3 (pressure switch mounted on top)</p> <p>LOCKABLE ISOLATION VALVE...V16  +A35 = U7H (coils 12V DC)  +A36 = U77 (coils 24V DC)  +A37 = U79 (coils 48V DC)  +A38 = U7K (coils 110V AC)  +A39 = U7J (coils 230V AC)  +A40 = G7H (coils 12V DC)  +A41 = G77 (coils 24V DC)  +A42 = G79 (coils 48V DC)  +A43 = G7K (coils 110V AC)  +A44 = G7J (coils 230V AC)</p>
F000	( 3 )	see MODULE (2) + [ * ]
R004	( 3 )	see MODULE (2) + [ * ]
L00	( 3 )	see MODULE (2) + [ * ]
V16	( 3 )	see MODULE (2) + [ * ]
-		
8	( 4 )	<p>PORTS (IN - OUT)*:</p> <p>= without ports  1/8 = G1/8  1/4 = G1/4  3/8 = G3/8  6 = tube Ø6  8 = tube Ø8  10 = tube Ø10</p>
-		
LH	( 5 )	<p>FLOW DIRECTION:</p> <p>= from left to right (standard)  LH = from right to left</p>
( 2 ) + ( 3 ) + [ * ]		REPEATABLE COMBINATION for a "n" number of times